

Description

The PPM8PN03R20L uses advanced trench technology to provide excellent $R_{DS(on)}$, low gate charge. This device is suitable for use as a load switch or in PWM applications.

MOSFET Product Summary


$V_{DS}(V)$	$R_{DS(on)}(m\Omega)(Typ)$	$I_D(A)$
-30	11.8@ $V_{GS} = -10V$	-40
	16.6@ $V_{GS} = -4.5V$	

Feature


- High Power and current handing capability
- Lead free product is acquired
- Surface Mount Package

Applications


- PWM applications
- Load switch
- Power management
- DC-DC Converters
- Wireless Chargers

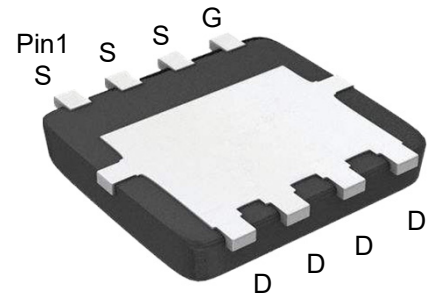

**PDFN3333-8L
(Bottom View)**



Circuit Diagram



Pin1

Marking (Top View)

Absolute maximum rating@25°C

Rating		Symbol	Value	Units
Drain-Source Voltage		V_{DS}	-30	V
Gate-Source Voltage		V_{GS}	± 20	V
Drain Current-Continuous ¹⁾	$T_C=25^\circ C$	I_D	-40	A
	$T_C=100^\circ C$		-25	
Pulsed Drain Current ²⁾		I_{DM}	-160	A
Total Power Dissipation ³⁾		P_D	34.7	W
Avalanche Current ⁴⁾		I_{AS}	-26	A
Avalanche Energy ⁴⁾		E_{AS}	33.8	mJ
Thermal Resistance , Junction-to-Case ⁵⁾		$R_{\theta JC}$	3.6	$^\circ C/W$
Thermal Resistance , Junction-to-Ambient ⁵⁾		$R_{\theta JA}$	45.4	$^\circ C/W$
Junction and Storage Temperature Range		T_J, T_{STG}	-55~+150	$^\circ C$

Electrical characteristics per line@25°C (unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS} = 0V, I_D = -250\mu A$	-30	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -30V, V_{GS} = 0V$	-	-	-1.0	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$	-	-	± 100	nA
On Characteristics						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-1.0	-1.4	-2.0	V
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS} = -10V, I_D = -7A$	-	11.8	14.8	m Ω
		$V_{GS} = -4.5V, I_D = -6A$	-	16.6	21	
Dynamic Characteristics ⁶⁾						
Input Capacitance	C_{iss}	$V_{DS} = -15V, V_{GS} = 0V, f = 1.0MHz$	-	912	-	pF
Output Capacitance	C_{oss}		-	132	-	
Reverse Transfer Capacitance	C_{rss}		-	110	-	
Switching Characteristics ⁶⁾						
Turn-on Delay Time	$t_{d(on)}$	$V_{DS} = -15V, V_{GS} = -10V, R_G = 1\Omega, I_D = -10A$	-	5.0	-	ns
Turn-on Rise Time	t_r		-	18	-	
Turn-Off Delay Time	$t_{d(off)}$		-	35	-	
Turn-Off Fall Time	t_f		-	25	-	
Total Gate Charge	Q_g	$V_{DS} = -15V, V_{GS} = -10V, I_D = -10A$	-	18	-	nC
Gate-Source Charge	Q_{gs}		-	2.6	-	
Gate-Drain Charge	Q_{gd}		-	4.2	-	
Gate Resistance	R_g	$V_{GS}=0V, V_{DS}=0V, f=1MHz$	-	8.2	-	Ω
Drain-Source Diode Characteristics						
Diode Forward Voltage	V_{SD}	$V_{GS} = 0V, I_S = -2A$	-	-0.8	-1.2	V
Reverse Recovery Time	t_{rr}	$I_F=-10A, d_f/d_t=100A/\mu s$	-	10.4	-	ns
Reverse Recovery Charge	Q_{rr}		-	2.1	-	nC

Notes:

1. Computed continuous current assumes the condition of T_{J_Max} while the actual continuous current depends on the thermal & electro-mechanical application board design.
2. Repetitive Rating: Pulse width limited by maximum junction temperature($T_{J_Max}=150^\circ C$).
3. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
4. This single-pulse measurement was taken under the following condition ($L=0.1mH, V_{GS}=-10V, V_{DS}=-30V$)while it's value is limited by $T_{J_Max}=150^\circ C$.
5. Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch square copper pad layout.
6. Guaranteed by design, not subject to production.

Typical Characteristics

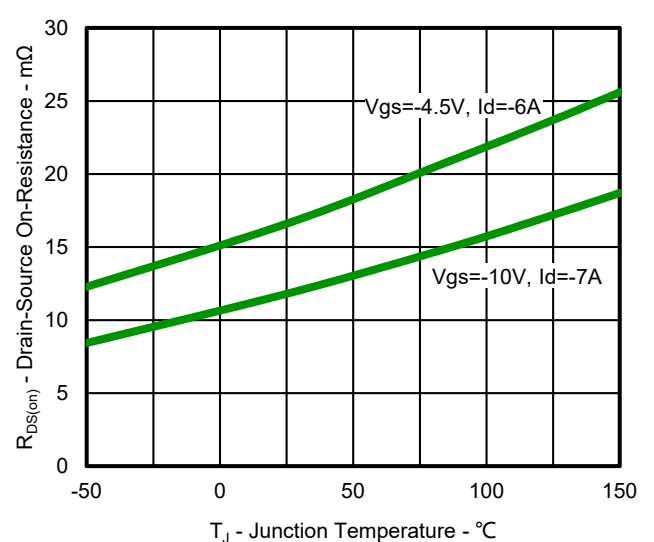
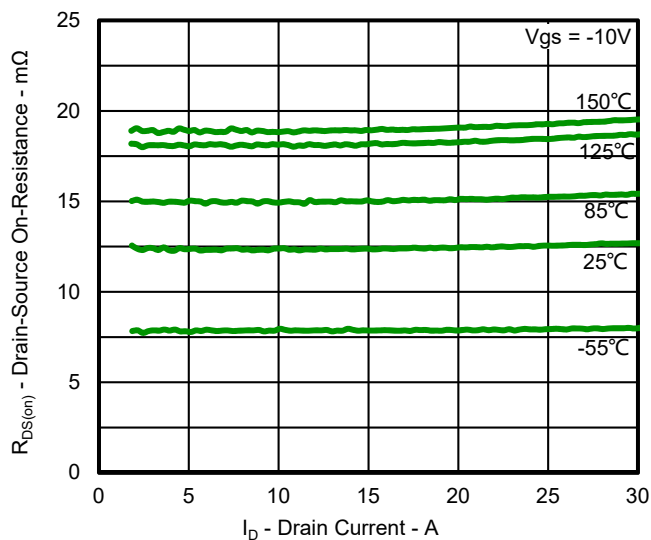
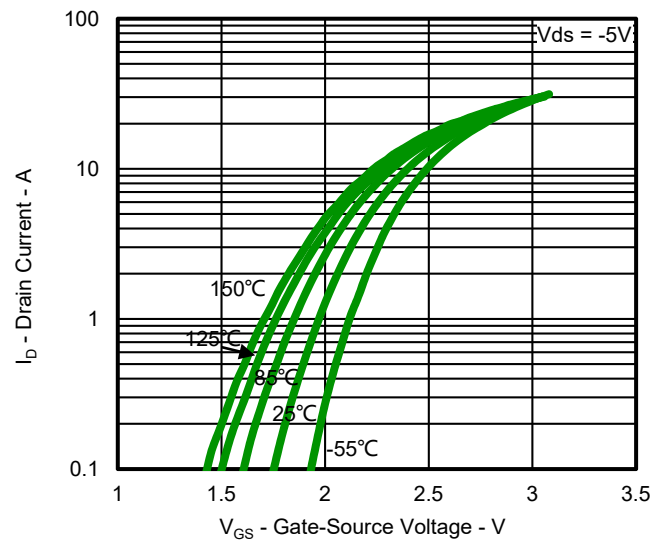
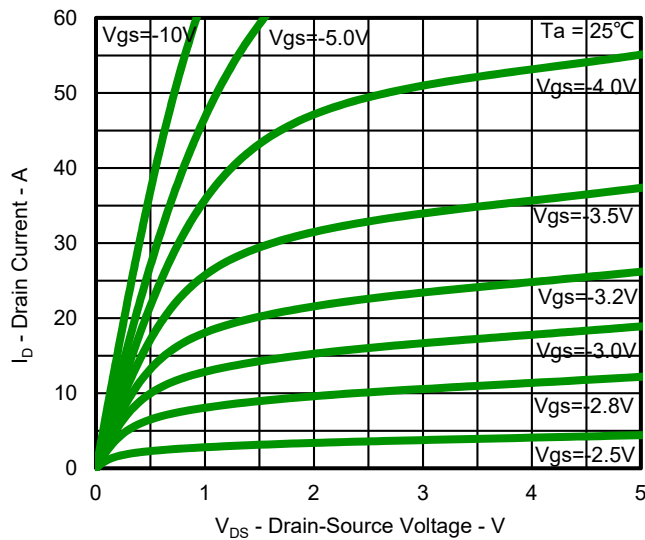


Fig.3 Typical On-Resistance vs Drain Current and Temperature

Fig.4 On-Resistance Variation with Temperature

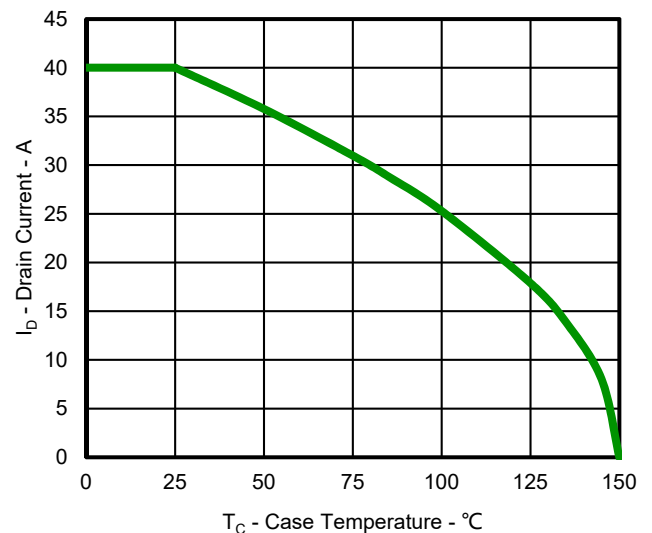
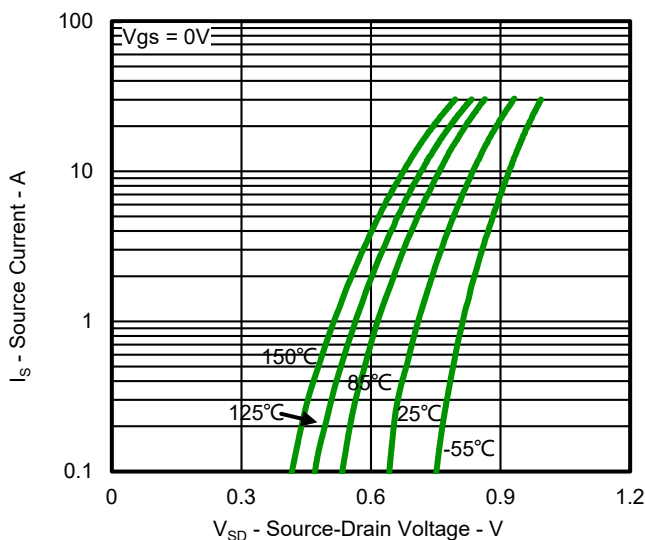


Fig.5 Diode Forward Voltage vs. Current

Fig.6 Maximum Drain Current vs. Case Temperature

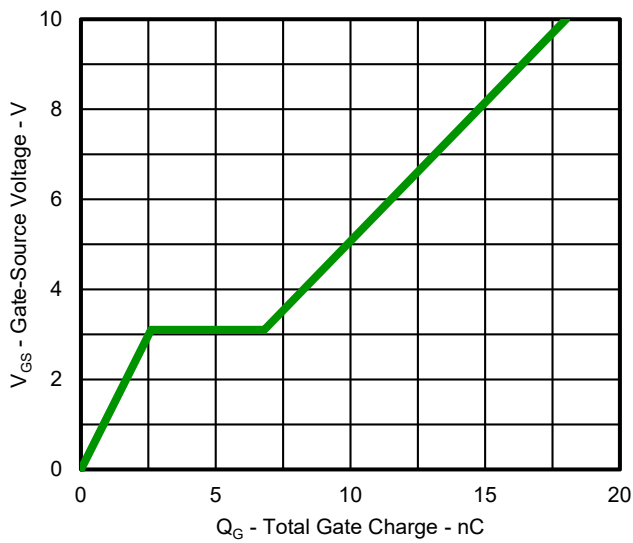


Fig.7 Gate Charge Characteristics

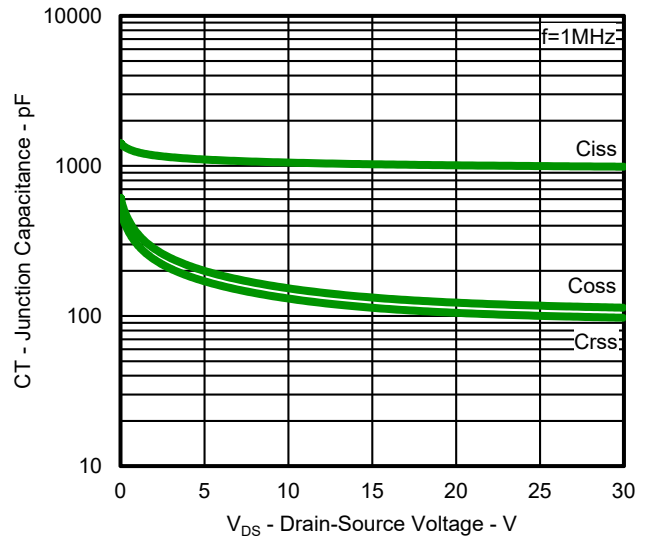


Fig.8 Typical Junction Capacitance

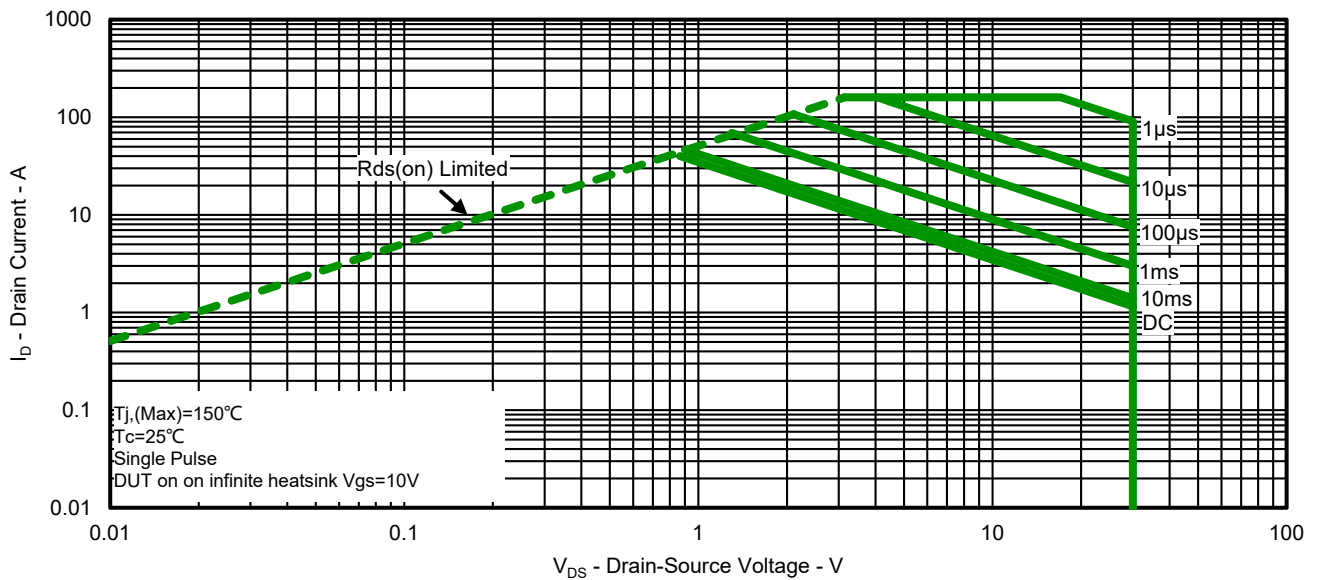


Fig.9 Safe Operation Area





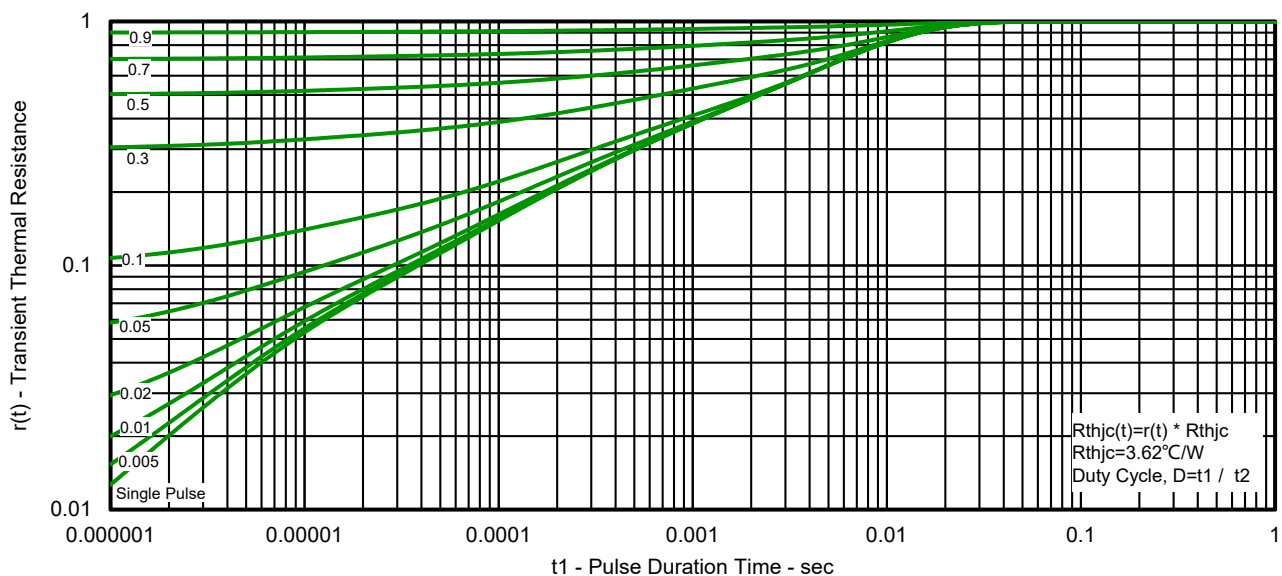


Fig.10 Transient Thermal Resistance

Product Dimension (PDFN3333-8L)

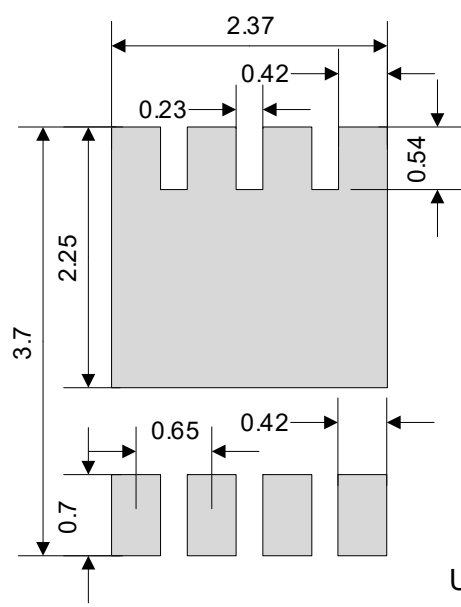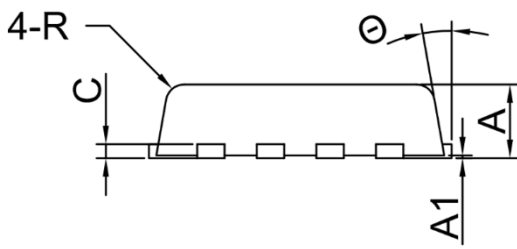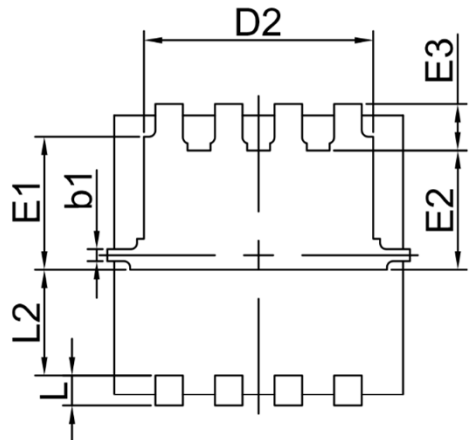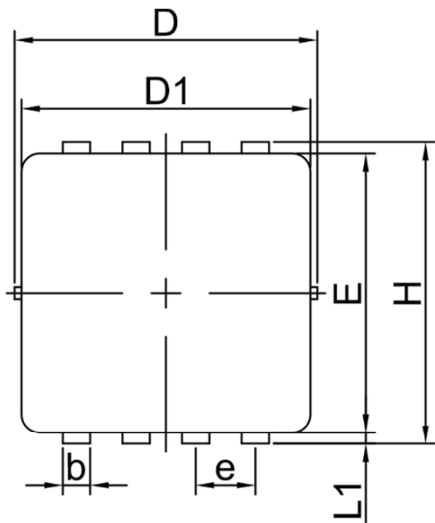

Unit: mm


Suggested PCB Layout

Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	0.60	0.90	0.024	0.035
A1	0.00	0.05	0.000	0.002
b	0.24	0.35	0.009	0.014
b1	0.08	0.30	0.003	0.012
c	0.152 Ref.		0.006 Ref.	
D	2.95	3.40	0.116	0.134
D1	2.95	3.25	0.116	0.128
D2	2.40	2.60	0.094	0.102
E	2.95	3.20	0.116	0.126
E1	1.35	1.57	0.053	0.062
E2	1.20	1.40	0.047	0.055
E3	0.40	0.60	0.016	0.024
e	0.65 BSC		0.026 BSC	
H	3.20	3.40	0.126	0.134
L	0.30	0.50	0.012	0.020
L1	0.10	0.20	0.004	0.008
L2	1.13 Ref.		0.044 Ref.	
R	0.20 Ref.		0.008 Ref.	
θ	5°	14°	5°	14°

Ordering Information

Package	Reel	Shipping
PDFN3333-8L	13"	5000 / Tape & Reel

Load With Information

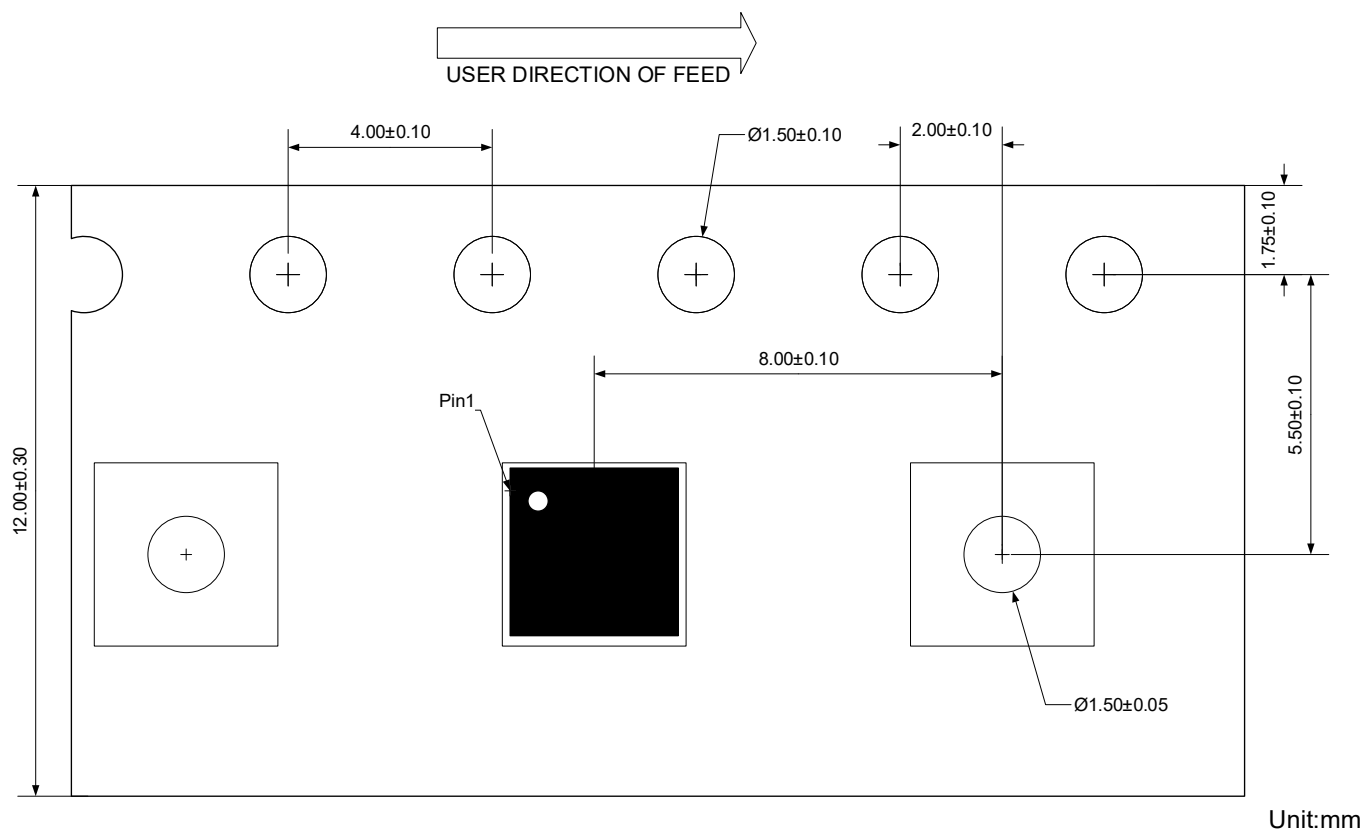

IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd** (Prisemi). Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.