


Product dimension (SMD1812)

Construction And Dimension (Unit: mm)

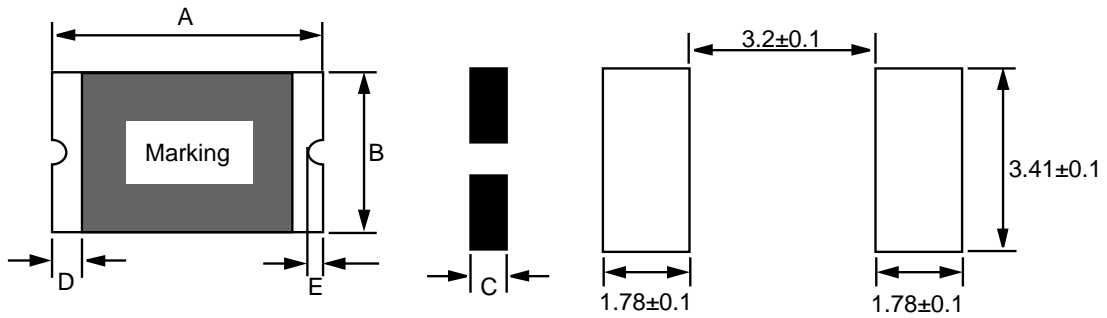

Recommended Pad Layout (mm)

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
PPMM010	4.37	4.73	3.07	3.41	0.50	1.00	0.30	0.25
PPMM014	4.37	4.73	3.07	3.41	0.50	1.00	0.30	0.25
PPMM020	4.37	4.73	3.07	3.41	0.50	1.30	0.30	0.25
PPMM030	4.37	4.73	3.07	3.41	0.50	1.00	0.30	0.25
PPMM050	4.37	4.73	3.07	3.41	0.40	0.90	0.30	0.25
PPMM050/33	4.37	4.73	3.07	3.41	0.70	1.30	0.30	0.25
PPMM050/60	4.37	4.73	3.07	3.41	1.10	1.80	0.30	0.25
PPMM075	4.37	4.73	3.07	3.41	0.40	0.90	0.30	0.25
PPMM110	4.37	4.73	3.07	3.41	0.40	0.90	0.30	0.25
PPMM110/16	4.37	4.73	3.07	3.41	0.60	1.30	0.30	0.25
PPMM125	4.37	4.73	3.07	3.41	0.60	1.30	0.30	0.25
PPMM150	4.37	4.73	3.07	3.41	0.40	1.20	0.30	0.25
PPMM150/16	4.37	4.73	3.07	3.41	0.40	1.20	0.30	0.25
PPMM160	4.37	4.73	3.07	3.41	0.40	1.20	0.30	0.25
PPMM200	4.37	4.73	3.07	3.41	0.50	1.30	0.30	0.25
PPMM260	4.37	4.73	3.07	3.41	0.50	1.50	0.30	0.25
PPMM300	4.37	4.73	3.07	3.41	0.50	1.50	0.30	0.25
PPMM350	4.37	4.73	3.07	3.41	0.50	1.50	0.30	0.25

Termination Pad Characteristics

Terminal pad material: Gold-plated Nickel-Copper or Tin-plated Nickel-Copper

Terminal pad solderability: Meets EIA specification RS186-9E and ANSI/J-STD-002 Category 3.