


Zener Voltage Regulators

Description

The PZ2FD5V6H is packaged in a DFN1006-2L surface mount package that has a power dissipation of 250mW. They are designed to provide voltage regulation protection and are especially attractive in situations where space is at a premium.



Feature

- Standard zener breakdown voltage range 5.6V
- DFN1006-2L package
- Steady state power rating of 250mW
- ➤ ESD rating of class 3(>16kV)per human body model
- > RoHS compliant transient


Mechanical Characteristics

- Mounting position: Any
- Qualified max reflow temperature:260°C
- Device meets MSL 1 requirements
- DFN1006-2L without plating

Applications

- Cellular phones
- Hand held portables
- High density PC boards

Electronics Parameter



Electrical characteristics per line@(unless otherwise specified)

| Parameter | Symbol | Conditions | Min. | Тур. | Max. | Units |
|-------------------------|-----------------|------------------------------|------|------|------|-------|
| Reverse Zener Voltage | Vz | I _{ZT} = 5mA | 5.33 | 5.60 | 5.87 | V |
| Maximum Zener Impedance | Z _{ZT} | I _{ZT} = 5mA | - | - | 40 | Ω |
| Maximum Zener Impedance | Z _{ZK} | I _{ZK} =0.5mA | - | - | 500 | Ω |
| Reverse Leakage Current | I _R | V _R =2V | - | - | 1 | μA |
| Forward Current | l _F | | | | 200 | mA |
| Forward Voltage | VF | I _F = 10mA | - | 0.8 | - | V |
| Capacitance | С | V _R =0V, f = 1MHz | - | 90 | - | pF |

Absolute maximum rating@25℃

| Rating | Symbol | Value | Units |
|---|----------------------------------|-------------|------------|
| Total Device Dissipation FR-5 Board | P _D | 250 | mW |
| Thermal Resistance, Junction-to-Ambient | R _{OJA} | 300 | °C/W |
| Storage Temperature | T _J ,T _{STG} | -65 to +150 | $^{\circ}$ |

Typical Characteristics




Fig 1.Typical Forward Voltage




Fig 2. Typical Capacitance




Fig 3.Zener Voltage versus Zener Current






Fig 4.Steady State Power Detating

Solder Reflow Recommendation

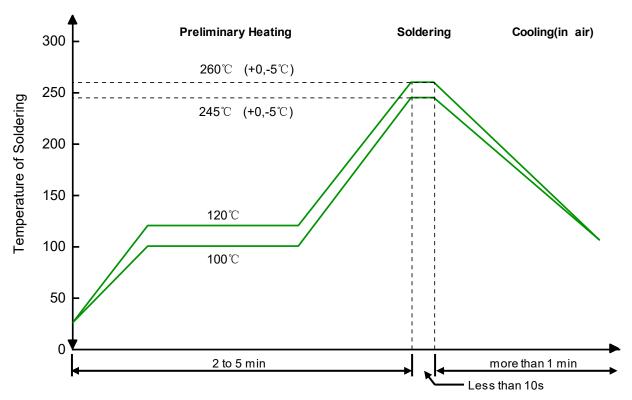


Remark: Pb free for 260°C; Pb for 245°C.


Load with information

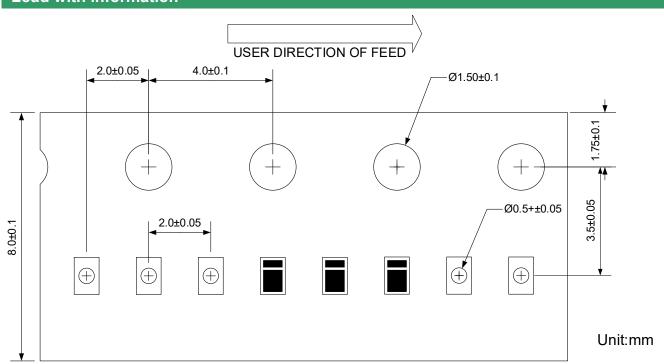

Product dimension (DFN1006-2L)



| Dim | Inches | | Millimeters | | |
|-----|-----------|-------|-------------|-------|--|
| | MIN | MAX | MIN | MAX | |
| Α | 0.013 | 0.020 | 0.34 | 0.498 | |
| В | 0.000 | 0.002 | 0.00 | 0.05 | |
| С | 0.037 | 0.043 | 0.95 | 1.080 | |
| D | 0.022 | 0.027 | 0.55 | 0.680 | |
| E | 0.016 | 0.024 | 0.40 | 0.60 | |
| F | 0.008 | 0.012 | 0.20 | 0.30 | |
| Н | 0.015Typ. | | 0.40Тур. | | |
| R | 0.001 | 0.005 | 0.05 | 0.15 | |



Unit:mm

Marking information



Ordering information

| Device | Package | Reel | Shipping |
|-----------|----------------------|------|---------------------|
| PZ2FD5V6H | DFN1006-2L (Pb-Free) | 7" | 10000 / Tape & Reel |

IMPORTANT NOTICE

and Prisemi are registered trademarks of Prisemi Electronics Co., Ltd (Prisemi), Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: http://www.prisemi.com
For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

Prisemi is a registered trademark of Prisemi Electronics.

All rights are reserved.