

Description

The PNMIP500V2 is a high voltage power MOSFET and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and have a high rugged avalanche characteristics. This power MOSFET is usually used at high speed switching applications in switching power supplies and adaptors.

MOSFET Product Summary



$V_{DS}(V)$	$R_{DS(on)}(\Omega)$	$I_D(A)$
500	5.0 @ $V_{GS} = 10V$	2.0

Feature

- Fast switching capability
- Avalanche energy tested
- Improved dv/dt capability, high ruggedness

Mechanical data

- Case: TO-251
- Approx. Weight: 0.315g (0.011oz)
- Lead free finish, RoHS compliant
- Case Material: "Green" molding compound, UL flammability classification 94V-0, "Halogen-free".

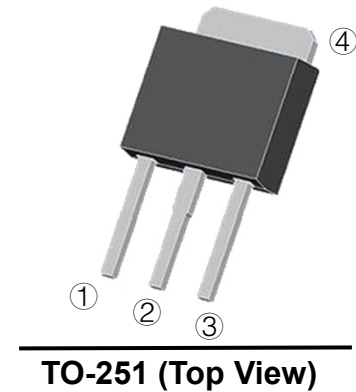

Absolute maximum rating@25°C

Rating	Symbol	Value	Units
Drain-Source Voltage	V_{DS}	500	V
Gate-Source Voltage	V_{GS}	± 30	V
Drain Current-Continuous	I_D	$T_C=25^\circ C$	2.0
		$T_C=100^\circ C$	1.3
Pulsed Drain Current ⁽²⁾	I_{DM}	8.0	A
Avalanche Energy, Single Pulsed ⁽³⁾	E_{AS}	35	mJ
Peak Diode Recovery dv/dt ⁽⁴⁾	dv/dt	2.1	V/ns
Maximum Power Dissipation	P_D	54	W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 ~ +150	°C
Junction-to-Ambient	$R_{\theta JA}$	63	°C/W
Junction to Case	$R_{\theta JC}$	2.31	°C/W

Electrical characteristics per line@25°C (unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS} = 0V, I_D = 250\mu A$	500	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 500V, V_{GS} = 0V$	-	-	1.0	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS} = \pm 30V, V_{DS} = 0V$	-	-	± 100	nA
On Characteristics						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0	-	4.0	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 1.0A$	-	5.0	7.0	Ω
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS} = 25V, V_{GS} = 0V,$ $f = 1.0MHz$	-	156	-	pF
Output Capacitance	C_{oss}		-	24	-	
Reverse Transfer Capacitance	C_{rss}		-	2.2	-	
Switching Characteristics						
Turn-on Delay Time ⁵⁾	$t_{d(on)}$	$V_{DS} = 250V, V_{GS} = 10V,$ $I_D = 2.0A, R_G = 25\Omega^{5,6)}$	-	8.4	-	ns
Turn-on Rise Time	t_r		-	22.4	-	
Turn-Off Delay Time	$t_{d(off)}$		-	15.1	-	
Turn-Off Fall Time	t_f		-	24.1	-	
Total Gate Charge ⁵⁾	Q_g	$V_{DS} = 400V, V_{GS} = 10V,$ $I_D = 2.0A, I_G = 1mA^{5,6)}$	-	8.97	-	nC
Gate-Source Charge	Q_{gs}		-	2.51	-	
Gate-Drain Charge	Q_{gd}		-	4.02	-	
Drain-Source Diode Characteristics						
Diode Forward Voltage ⁵⁾	V_{SD}	$V_{GS} = 0V, I_S = 2.0A$	-	-	1.4	V
Diode Continuous Current	I_S		-	-	2.0	A
Diode Pulsed Current	I_{SM}		-	-	8.0	A
Reverse Recovery Time ⁵⁾	t_{rr}	$V_{GS} = 0V, I_S = 2.0A,$ $di/dt = 100A/\mu s$	-	309	-	nS
Reverse Recovery Charge	Q_{rr}		-	0.95	-	μC

Notes:

1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. Repetitive Rating: Pulse width limited by maximum junction temperature.
3. $L = 30mH, I_{AS} = 2.6A, V_{DD} = 50V, R_G = 25\Omega$, Starting $T_J = 25^\circ C$
4. $I_{SD} \leq 2A, di/dt \leq 200A/\mu s, V_{DD} \leq BV_{DSS}$, Starting $T_J = 25^\circ C$
5. Pulse Test: Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$.
6. Essentially independent of operating temperature.

Typical Characteristics

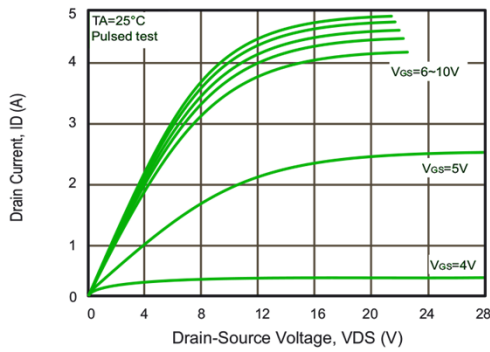


Fig.1 Drain Current vs. Gate-Source Voltage

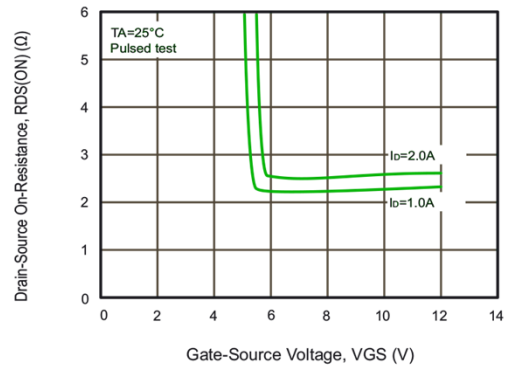


Fig.2 Drain-Source On-Resistance vs. Gate-Source Voltage

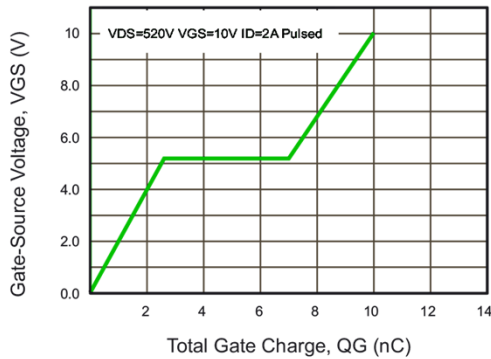


Fig.3 Gate Charge Characteristics

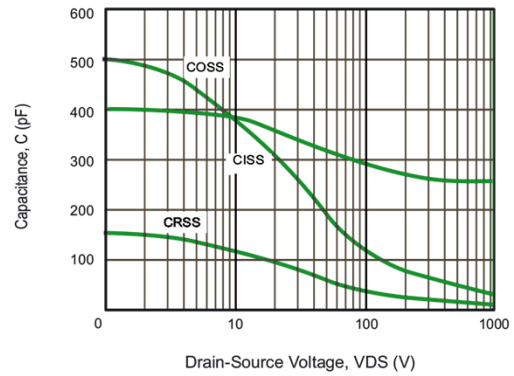


Fig.4 Capacitance Characteristics

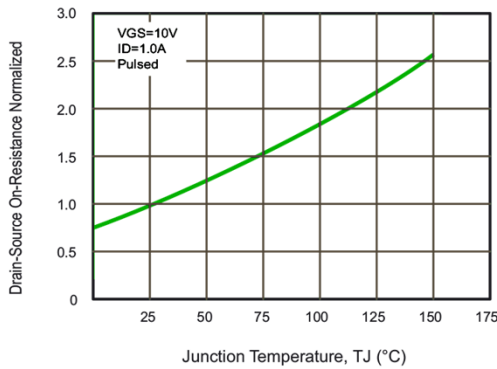


Fig.5 Drain-Source On-Resistance vs. Junction Temperature

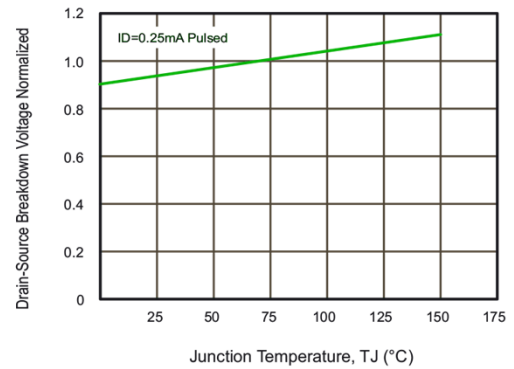


Fig.6 Breakdown Voltage vs. Junction Temperature

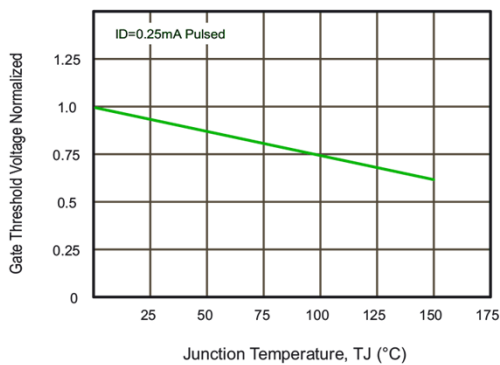


Fig.7 Gate Threshold Voltage vs. Junction Temperature

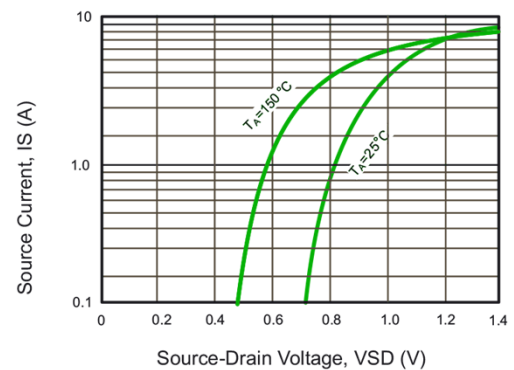


Fig.8 Source Current vs. Source-Drain Voltage

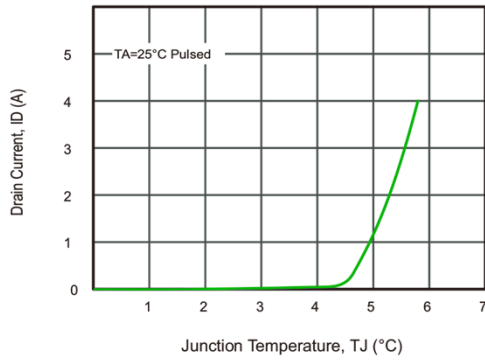


Fig.9 Drain Current vs. Gate-Source Voltage

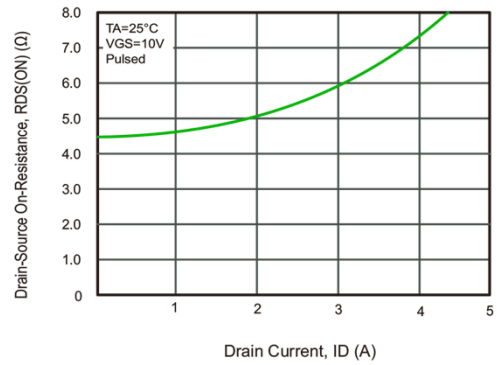


Fig.10 Drain-Source On-Resistance vs. Drain Current

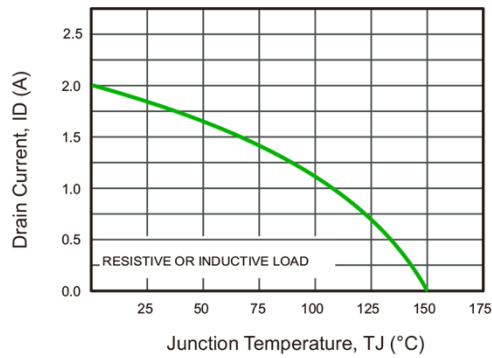


Fig.11 Drain Current vs. Junction Temperature

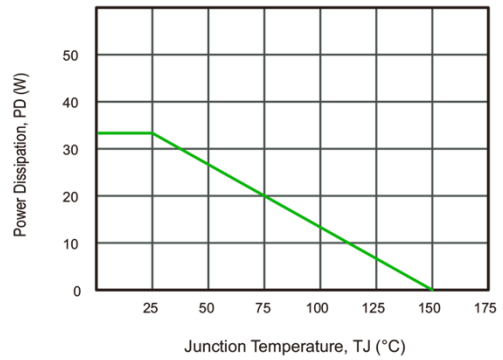


Fig.12 Power Dissipation vs. Junction Temperature


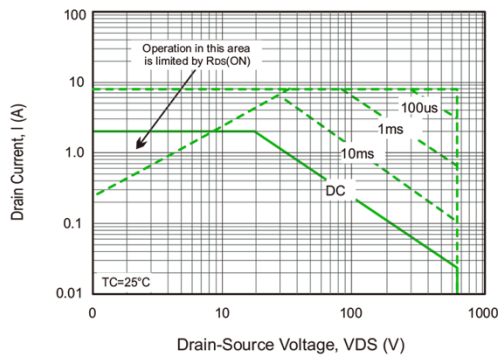



Fig.13 Safe Operating Area

Product dimension (TO-251)

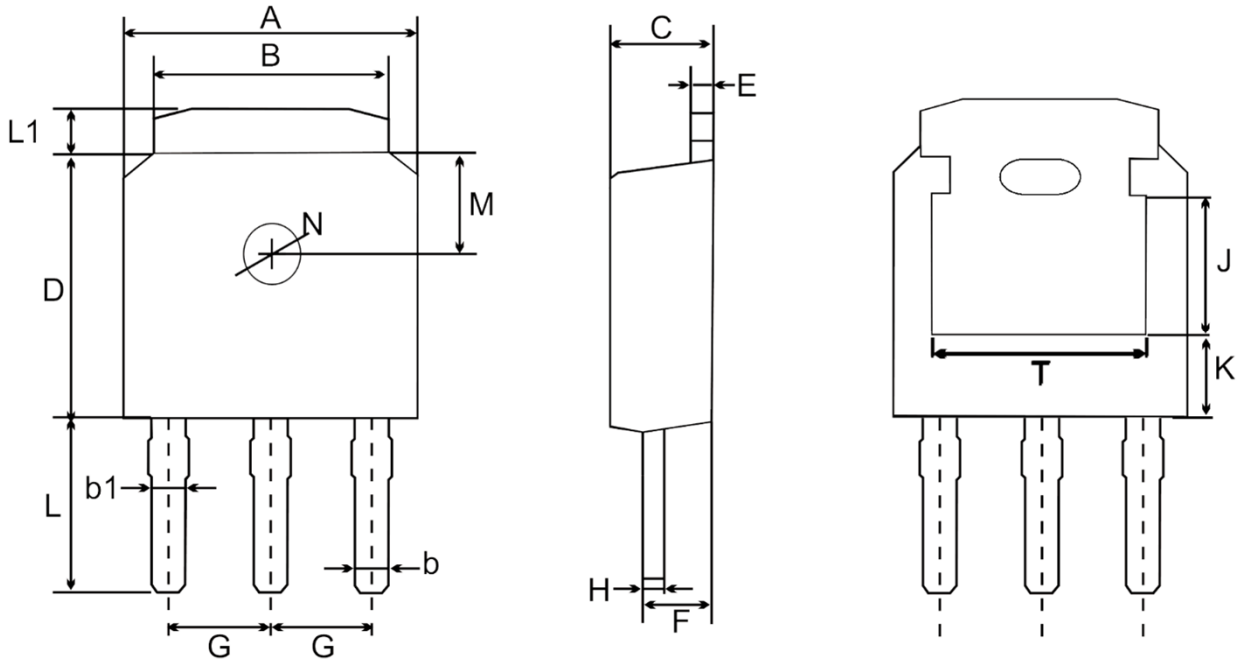

Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	6.30	6.70	0.248	0.264
B	5.10	5.50	0.201	0.217
b	0.30	0.80	0.012	0.031
b1	0.76	0.90	0.030	0.035
C	2.10	2.50	0.083	0.098
D	5.90	6.30	0.232	0.248
E	0.40	0.60	0.016	0.024
F	1.30	1.80	0.051	0.071
G	2.29 Typ.		0.090 Typ.	
H	0.45	0.55	0.018	0.022
L	3.90	4.30	0.154	0.169
L1	0.80	1.20	0.031	0.047
M	1.80 Typ.		0.071 Typ.	
N	1.30 Typ.		0.051 Typ.	
J	3.16 Ref.		0.124 Ref.	
K	1.80 Ref.		0.071 Ref.	
T	4.83 Ref.		0.190 Ref.	


IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd** (Prisemi), Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.