

PDTC143TM

Digital Transistor(built-in resistors)

Feature

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit).
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- Only the on/off conditions need to be set for operation, making the device design easy.

Applications

- Inverter
- Interface
- Driver

Mechanical Characteristics


- Lead finish:100% matte Sn(Tin)
- Mounting position: Any
- Qualified max reflow temperature:260°C
- Pure tin plating: 7 ~ 17 um
- ➢ Pin flatness:≤3mil


Structure

NPN epitaxial planar silicon transistor (Resistor built-in type)

Electrical characteristics per line@25°C(unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Units
Collector-base breakdown voltage	ВV _{сво}	Ic =50μΑ	50			V
Collector-emitter breakdown	BV _{CEO}	I _C =1mA	50			V
Emitter-base breakdown voltage	BV _{EBO}	Ι _Ε =50μΑ	5			V
Collector cutoff current	Ісво	V _{CB} =50V			0.5	μA
Emitter cutoff current	I _{EBO}	V _{EB} =4V			0.5	μA
Collector-emitter saturation	V _{CE(sat)}	Ic/I _B =5mA/0.25mA			0.3	V
DC current transfer ratio	hfe	Ic=1mA, Vce=5V	100	250	600	-
Input resistance	R1	-	3.29	4.7	6.11	kΩ
Transition frequency	f⊤	V _{CE} =10V, I _E = −5mA,		250		MHz






Digital Transistor(built-in resistors)


PDTC143TM


Absolute maximum rating@25°C


Rating	Symbol	Value	Units
Collector-base voltage	Vсво	50	V
Collector-emitter voltage	Vceo	50	V
Emitter-base voltage	Vebo	5	V
Collector current	lc	100	mA
Collector power dissipation	Pc	150	mW
Junction temperature	Tj	150	°C
Storage temperature	T _{stg}	-55 to +150	°C

Typical Characteristics

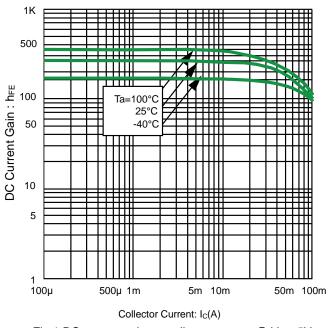



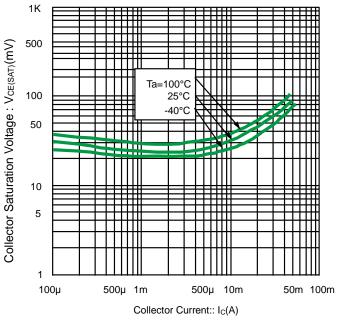




 $@I_C/I_B=10$


Digital Transistor(built-in resistors)

PDTC143TM

Solder Reflow Recommendation

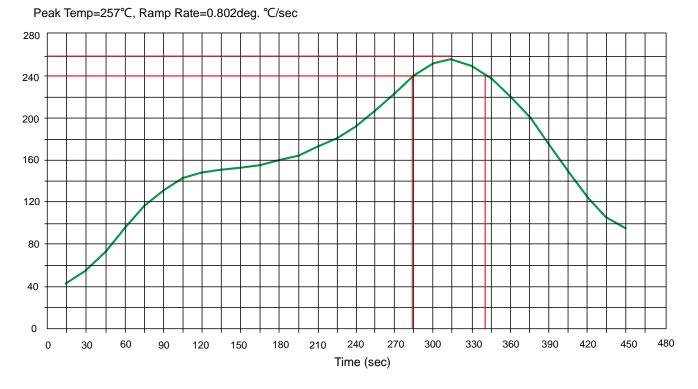


Product dimension (SOT-723)

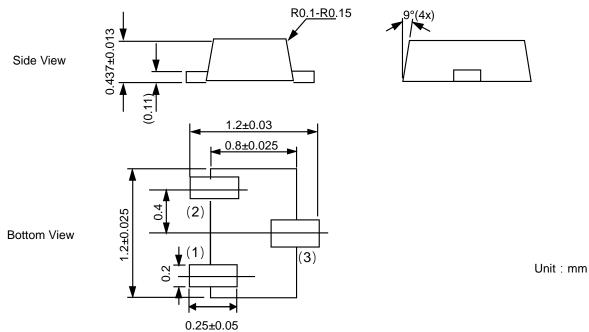

Digital Transistor(built-in resistors)

PDTC143TM

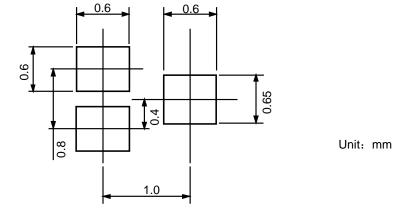

Ordering information

Device	Package	Shipping
PDTC143TM	SOT-723 (Pb-Free)	8000 / Tape & Reel

IMPORTANT NOTICE

and **Prisemi** are registered trademarks of **Prisemi Electronics Co., Ltd** (Prisemi), Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: http://www.prisemi.com For additional information, please contact your local Sales Representative. ©Copyright 2009, Prisemi Electronics is a registered trademark of Prisemi Electronics. All rights are reserved.