

Description

The PPMM are designed specifically to provide over current protection for sensitive electronic equipment, the over current events are usually caused by voltage transients induced by lightning and other transient overvoltage.



Feature

SMD1812

- For surface mounted application to optimize board space
- Low profile package
- Lead free device size 0.18*0.12 inch/4.5*3.2 mm
- High temperature soldering guaranteed:260°C/40 seconds at terminals

Applications

PPMM device are ideal for the over current protection of I/O interfaces, VCC bus and other vulnerable circuits used in telecom, computer industrial and consumer electronic application, When the current reaches its trip current, its internal impedance will increase rapidly, so as to reduce the over current.

Electrical Characteristics

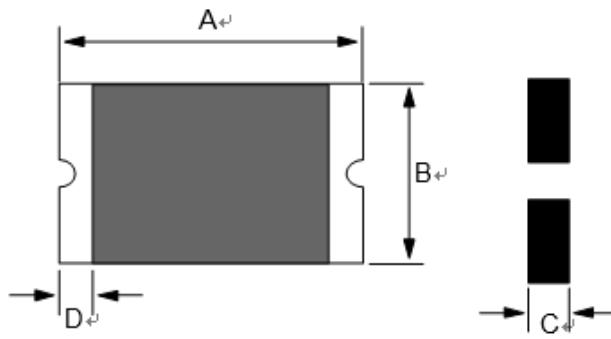
Model	UL、 TUV、 CSA	V _{max}	I _{max}	I _{hold@25°C}	I _{trip@25°C}	P _d typ.	Resistance (Ω)		Maximum Time To Trip	
		(Vdc)	(A)	(A)	(A)	(W)	R _i min	R _{1max}	(A)	(Sec)
PPMM010	√	60	10	0.1	0.3	0.8	0.70	15.00	0.5	1.5
PPMM010/50	×	50	10	0.1	0.3	0.8	0.70	15.00	0.5	1.5
PPMM014	√	60	10	0.14	0.34	0.8	0.40	6.50	1.5	0.15
PPMM014/50	×	50	10	0.14	0.34	0.8	0.40	6.50	1.5	0.15
PPMM020	√	30	10	0.2	0.4	0.8	0.75	5.00	8	0.2
PPMM020/60	√	60	10	0.2	0.4	0.8	0.40	6.00	1.5	0.15
PPMM020/50	×	50	10	0.2	0.4	0.8	0.40	6.00	1.5	0.15
PPMM030	√	30	10	0.3	0.6	0.8	0.30	3.00	8	0.1
PPMM035	√	16	40	0.35	0.7	0.8	0.20	1.80	8	0.1
PPMM035/30	×	30	40	0.35	0.7	0.8	0.20	1.80	8	0.1
PPMM050	√	15	40	0.5	1	0.8	0.15	1.00	8	0.15
PPMM050/16	×	16	40	0.5	1	0.8	0.15	1.00	8	0.15
PPMM050/30	×	30	40	0.5	1	0.8	0.15	1.00	8	0.15

Surface Mount -Positive temperature coefficient Fuse
PPMM

Model	UL, TUV, CSA	V _{max}	I _{max}	I _{hold@25°C}	I _{trip@25°C}	P _{d typ.}	Resistance (Ω)		Maximum Time To Trip	
		(Vdc)	(A)	(A)	(A)	(W)	R _{i min}	R _{1 max}	(A)	(Sec)
PPMM075	✓	16	40	0.75	1.5	0.8	0.11	0.45	8	0.2
PPMM075-P	✗	16	100	0.75	1.5	0.8	0.11	0.45	8	0.2
PPMM075/24	✓	24	40	0.75	1.5	0.8	0.11	0.45	8	0.2
PPMM075/33	✓	33	40	0.75	1.5	0.8	0.11	0.50	8	0.2
PPMM110	✓	6	100	1.1	2.2	0.8	0.04	0.23	8	0.3
PPMM110/8	✗	8	100	1.1	2.2	0.8	0.04	0.23	8	0.3
PPMM110/12	✗	12	100	1.1	2.2	0.8	0.40	0.23	8	0.3
PPMM110/16	✓	16	100	1.1	2.2	0.8	0.04	0.23	8	0.5
PPMM110/24	✓	24	100	1.1	2.2	1.2	0.06	0.18	8	0.5
PPMM110/33	✗	33	100	1.1	2.2	1.2	0.055	0.22	8	0.5
PPMM125	✓	6	40	1.25	2.5	0.8	0.04	0.14	8	0.4
PPMM125/8	✗	8	100	1.25	2.5	0.8	0.04	0.14	8	0.4
PPMM125/12	✗	12	100	1.25	2.5	0.8	0.04	0.14	8	0.4
PPMM125/16	✗	16	100	1.25	2.5	0.8	0.04	0.14	8	0.4
PPMM125-P	✗	16	100	1.25	2.5	0.8	0.04	0.14	8	0.4
PPMM150	✓	6	100	1.5	3	0.8	0.03	0.12	8	0.5
PPMM150/8	✗	8	100	1.5	3	0.8	0.03	0.12	8	0.5
PPMM150/12	✓	12	100	1.5	3	1.0	0.03	0.12	8	0.5
PPMM150/16	TUV	16	100	1.5	3	1.0	0.03	0.12	8	0.5
PPMM150/24	✓	24	100	1.5	3	1.2	0.03	0.14	8	1.5
PPMM160/6	✗	6	100	1.6	3.2	1	0.025	0.12	8	1
PPMM160	✓	8	100	1.6	3.2	1	0.025	0.12	8	1
PPMM160/12	✓	12	100	1.6	3.2	1	0.025	0.12	8	1
PPMM160/16	✓	16	100	1.6	3.2	1	0.025	0.12	8	1
PPMM200	UL	8	40	2	4	1.2	0.02	0.08	8	3
PPMM200	TUV	8	100	2	4	1.2	0.02	0.08	8	3
PPMM200/12	✗	12	100	2	4	1.2	0.02	0.08	8	3
PPMM200/16	✗	16	100	2	4	1.2	0.02	0.08	8	3

Surface Mount -Positive temperature coefficient Fuse
PPMM

Model	UL、 TUV、 CSA	V _{max}	I _{max}	I _{hold@25°C}	I _{trip@25°C}	P _{d typ.}	Resistance (Ω)		Maximum Time To Trip	
		(Vdc)	(A)	(A)	(A)	(W)	R _{i min}	R _{1 max}	(A)	(Sec)
PPMM200/8S	UL	8	40	2	4	1.2	0.02	0.08	8	3
PPMM200/6S	×	6	40	2	4	1.2	0.02	0.08	8	3
PPMM250/16	√	16	100	2.5	5	1.2	0.015	0.1	8	5
PPMM250/12	×	12	100	2.5	5	1.2	0.015	0.1	8	5
PPMM250/8	×	8	100	2.5	5	1.2	0.015	0.1	8	5
PPMM250/8S	×	8	100	2.5	5	1.2	0.015	0.1	8	5
PPMM250/6S	×	6	100	2.5	5	1.2	0.015	0.1	8	5
PPMM260	√	6	100	2.6	5.2	1.2	0.015	0.08	8	5
PPMM260/12	×	12	100	2.6	5.2	1.2	0.015	0.08	8	5
PPMM260/16	×	16	100	2.6	5.2	1.2	0.015	0.08	8	5
PPMM260/8S	×	8	100	2.6	5.2	1.2	0.015	0.08	8	5
PPMM260/6S	×	6	100	2.6	5.2	1.2	0.015	0.08	8	5
PPMM300	×	12	100	3	6	1.2	0.012	0.06	8	5
PPMM300/6	√	6	100	3	6	1.2	0.012	0.06	8	5
PPMM300/8	×	8	100	3	6	1.2	0.012	0.06	8	5

Construction And Dimension (Unit: mm)


Top and bottom view

side view

Model	Marking	A		B		C		D
		Min	Max	Min	Max	Min	Max	Min
PPMM010	T010	4.37	4.73	3.07	3.41	0.8	1.2	0.3
PPMM010/50	T010	4.37	4.73	3.07	3.41	0.8	1.2	0.3
PPMM014	T014	4.37	4.73	3.07	3.41	0.8	1.2	0.3
PPMM014/50	T014	4.37	4.73	3.07	3.41	0.8	1.2	0.3
PPMM020	T020	4.37	4.73	3.07	3.41	0.8	1.2	0.3
PPMM020/60	T020	4.37	4.73	3.07	3.41	0.8	1.2	0.3
PPMM020/50	T020	4.37	4.73	3.07	3.41	0.8	1.2	0.3
PPMM030	T030	4.37	4.73	3.07	3.41	0.8	1.2	0.3
PPMM035	T035	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM035/30	T035	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM050	T050	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM050/16	T050	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM050/30	T050	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM075	T075	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM075-P	T075	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM075/24	T075	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM075/33	T075	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM110	T110	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM110/8	T110	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM110/12	T110	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM110/16	T110	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM110/24	T110	4.37	4.73	3.07	3.41	0.8	1.2	0.3
PPMM110/33	T110	4.37	4.73	3.07	3.41	0.8	1.5	0.3
PPMM125	T125	4.37	4.73	3.07	3.41	0.45	0.85	0.3
PPMM125/8	T125	4.37	4.73	3.07	3.41	0.45	0.85	0.3

Surface Mount -Positive temperature coefficient Fuse
PPMM

Model	Marking	A		B		C		D
		Min	Max	Min	Max	Min	Max	Min
PPMM125/12	T125	4.37	4.73	3.07	3.41	0.45	0.85	0.3
PPMM125/16	T125	4.37	4.73	3.07	3.41	0.45	0.85	0.3
PPMM125-P	T125	4.37	4.73	3.07	3.41	0.45	0.85	0.3
PPMM150	T150	4.37	4.73	3.07	3.41	0.45	0.85	0.3
PPMM150/8	T150	4.37	4.73	3.07	3.41	0.45	0.85	0.3
PPMM150/12	T150	4.37	4.73	3.07	3.41	0.45	0.85	0.3
PPMM150/16	T150	4.37	4.73	3.07	3.41	0.45	0.85	0.3
PPMM150/24	T150	4.37	4.73	3.07	3.41	1.2	1.7	0.3
PPMM160/6	T160	4.37	4.73	3.07	3.41	0.45	0.85	0.3
PPMM160	T160	4.37	4.73	3.07	3.41	0.45	0.85	0.3
PPMM160/12	T160	4.37	4.73	3.07	3.41	0.45	0.85	0.3
PPMM160/16	T160	4.37	4.73	3.07	3.41	0.45	0.85	0.3
PPMM200	T200	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM200/12	T200	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM200/16	T200	4.37	4.73	3.07	3.41	0.9	1.3	0.3
PPMM200/8S	T200	4.37	4.73	3.07	3.41	0.4	0.6	0.3
PPMM200/6S	T200	4.37	4.73	3.07	3.41	0.4	0.6	0.3
PPMM250/16	T250	4.37	4.73	3.07	3.41	0.9	1.3	0.3
PPMM250/12	T250	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM250/8	T250	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM250/8S	T250	4.37	4.73	3.07	3.41	0.4	0.6	0.3
PPMM250/6S	T250	4.37	4.73	3.07	3.41	0.4	0.6	0.3
PPMM260	T260	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM260/12	T260	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM260/16	T260	4.37	4.73	3.07	3.41	0.9	1.3	0.3
PPMM260/8S	T260	4.37	4.73	3.07	3.41	0.4	0.6	0.3
PPMM260/6S	T260	4.37	4.73	3.07	3.41	0.4	0.6	0.3
PPMM300	T300	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM300/6	T300	4.37	4.73	3.07	3.41	0.6	1	0.3
PPMM300/8	T300	4.37	4.73	3.07	3.41	0.6	1	0.3

Thermal Derating Chart-I_{hold}

Model	Ambient Operating Temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
PPMM010	0.16	0.14	0.12	0.1	0.08	0.07	0.06	0.05	0.03
PPMM010/50	0.16	0.14	0.12	0.1	0.08	0.07	0.06	0.05	0.03
PPMM014	0.23	0.19	0.17	0.14	0.12	0.1	0.09	0.08	0.06
PPMM014/50	0.23	0.19	0.17	0.14	0.12	0.1	0.09	0.08	0.06
PPMM020	0.29	0.26	0.23	0.2	0.17	0.15	0.14	0.12	0.1
PPMM020/60	0.29	0.26	0.23	0.2	0.17	0.15	0.14	0.12	0.1
PPMM020/50	0.29	0.26	0.23	0.2	0.17	0.15	0.14	0.12	0.1
PPMM030	0.44	0.39	0.35	0.3	0.26	0.23	0.21	0.18	0.15
PPMM035	0.51	0.46	0.41	0.35	0.3	0.27	0.25	0.21	0.18
PPMM035/30	0.51	0.46	0.41	0.35	0.3	0.27	0.25	0.21	0.18
PPMM050	0.77	0.68	0.59	0.5	0.44	0.4	0.37	0.33	0.29
PPMM050/16	0.77	0.68	0.59	0.5	0.44	0.4	0.37	0.33	0.29
PPMM050/30	0.77	0.68	0.59	0.5	0.44	0.4	0.37	0.33	0.29
PPMM075	1.15	1.01	0.88	0.75	0.65	0.6	0.55	0.49	0.43
PPMM075-P	1.15	1.01	0.88	0.75	0.65	0.6	0.55	0.49	0.43
PPMM075/24	1.15	1.01	0.88	0.75	0.65	0.6	0.55	0.49	0.43
PPMM075/33	1.15	1.01	0.88	0.75	0.65	0.6	0.55	0.49	0.43
PPMM110	1.59	1.43	1.26	1.1	0.95	0.87	0.8	0.71	0.6
PPMM110/8	1.59	1.43	1.26	1.1	0.95	0.87	0.8	0.71	0.6
PPMM110/12	1.59	1.43	1.26	1.1	0.95	0.87	0.8	0.71	0.6
PPMM110/16	1.59	1.43	1.26	1.1	0.95	0.87	0.8	0.71	0.6
PPMM110/24	2	1.7	1.4	1.1	0.95	0.88	0.8	0.73	0.61
PPMM110/33	2	1.7	1.4	1.1	0.95	0.88	0.8	0.73	0.61
PPMM125	1.8	1.63	1.43	1.25	1.08	0.99	0.91	0.81	0.68
PPMM125/8	1.8	1.63	1.43	1.25	1.08	0.99	0.91	0.81	0.68
PPMM125/12	1.8	1.63	1.43	1.25	1.08	0.99	0.91	0.81	0.68
PPMM125/16	1.8	1.63	1.43	1.25	1.08	0.99	0.91	0.81	0.68
PPMM125-P	1.8	1.63	1.43	1.25	1.08	0.99	0.91	0.81	0.68
PPMM150	2.17	1.95	1.72	1.5	1.3	1.18	1.09	0.97	0.82
PPMM150/8	2.17	1.95	1.72	1.5	1.3	1.18	1.09	0.97	0.82
PPMM150/12	2.17	1.95	1.72	1.5	1.3	1.18	1.09	0.97	0.82
PPMM150/16	2.17	1.95	1.72	1.5	1.3	1.18	1.09	0.97	0.82
PPMM150/24	2.17	1.95	1.72	1.5	1.3	1.18	1.09	0.97	0.82
PPMM160/6	2.3	2.2	1.9	1.6	1.45	1.3	1.15	1.03	0.91
PPMM160	2.3	2.2	1.9	1.6	1.45	1.3	1.15	1.03	0.91
PPMM160/12	2.3	2.2	1.9	1.6	1.45	1.3	1.15	1.03	0.91
PPMM160/16	2.3	2.2	1.9	1.6	1.45	1.3	1.15	1.03	0.91
PPMM200	3.08	2.71	2.35	2	1.8	1.6	1.5	1.4	1.25
PPMM200/12	3.08	2.71	2.35	2	1.8	1.6	1.5	1.4	1.25
PPMM200/16	3.08	2.71	2.35	2	1.8	1.6	1.5	1.4	1.25
PPMM200/8S	3.08	2.71	2.35	2	1.8	1.6	1.5	1.4	1.25
PPMM200/6S	3.08	2.71	2.35	2	1.8	1.6	1.5	1.4	1.25

Surface Mount -Positive temperature coefficient Fuse
PPMM

Model	Ambient Operating Temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
PPMM250/16	3.85	3.45	3	2.5	2.05	1.85	1.75	1.3	1.1
PPMM250/12	3.85	3.45	3	2.5	2.05	1.85	1.75	1.3	1.1
PPMM250/8	3.85	3.45	3	2.5	2.05	1.85	1.75	1.3	1.1
PPMM250/8S	3.85	3.45	3	2.5	2.05	1.85	1.75	1.3	1.1
PPMM250/6S	3.85	3.45	3	2.5	2.05	1.85	1.75	1.3	1.1
PPMM260	4	3.52	3.06	2.6	2.34	2.08	1.95	1.39	1.04
PPMM260/12	4	3.52	3.06	2.6	2.34	2.08	1.95	1.39	1.04
PPMM260/16	4	3.52	3.06	2.6	2.34	2.08	1.95	1.39	1.04
PPMM260/8S	4	3.52	3.06	2.6	2.34	2.08	1.95	1.39	1.04
PPMM260/6S	4	3.52	3.06	2.6	2.34	2.08	1.95	1.39	1.04
PPMM300	4.4	3.9	3.5	3	2.6	2.3	2.1	1.8	1.5
PPMM300/6	4.4	3.9	3.5	3	2.6	2.3	2.1	1.8	1.5
PPMM300/8	4.4	3.9	3.5	3	2.6	2.3	2.1	1.8	1.5

Ordering information

Model	Packing Q'ty(Pcs / Reel)	Model	Packing Q'ty(Pcs / Reel)
PPMM010	1500	PPMM150	2000
PPMM010/50	1500	PPMM150/8	2000
PPMM014	1500	PPMM150/12	2000
PPMM014/50	1500	PPMM150/16	2000
PPMM020	1500	PPMM150/24	1000
PPMM020/60	1500	PPMM160/6	2000
PPMM020/50	1500	PPMM160	2000
PPMM030	1500	PPMM160/12	2000
PPMM035	1500	PPMM160/16	2000
PPMM035/30	1500	PPMM200	1500
PPMM050	2000	PPMM200/12	1500
PPMM050/16	2000	PPMM200/16	1500
PPMM050/30	2000	PPMM200/8S	2000
PPMM075	2000	PPMM200/6S	2000
PPMM075-P	2000	PPMM250/16	1500
PPMM075/24	2000	PPMM250/12	1500
PPMM075/33	2000	PPMM250/8	1500
PPMM110	2000	PPMM250/8S	2000
PPMM110/8	2000	PPMM250/6S	2000
PPMM110/12	2000	PPMM260	1500
PPMM110/16	2000	PPMM260/12	1500
PPMM110/24	1500	PPMM260/16	1500

IMPORTANT NOTICE

 and **Prisemi**® are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**® is a registered trademark of Prisemi Electronics.

All rights are reserved.