

## Description

The PNMTOF700V7 is a high voltage power MOSFET and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and have a high rugged avalanche characteristics. This power MOSFET is usually used at high speed switching applications in switching power supplies and adaptors.

## Feature


- $R_{DS(ON)} \leq 1.4 \Omega @ V_{GS}=10V, I_D=3.5A$
- Fast switching capability
- Avalanche energy tested
- Improved dv/dt capability, high ruggedness

## Applications


- Automotive applications
- Power switching application
- Hard switched and high frequency circuits
- Uninterruptible power supply

## Mechanical data

- Case: TO-220F-3L
- Approx. Weight: 1.767g (0.062oz)
- Lead free finish, RoHS compliant
- Case Material: "Green" molding compound, UL flammability classification 94V-0, "Halogen-free".

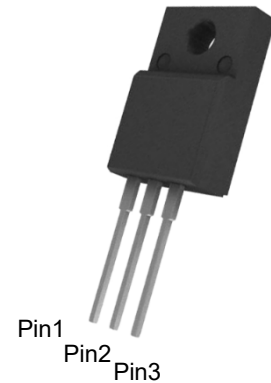

**TO-220F-3L (Top View)**

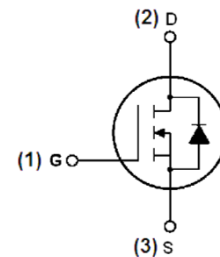

**Schematic diagram**

## Absolute maximum rating@25°C

Rating	Symbol	Value	Units
Drain-Source Voltage	$V_{DS}$	700	V
Gate-Source Voltage	$V_{GS}$	$\pm 30$	V
Drain Current-Continuous	$I_D$	$T_C=25^\circ C$	7
		$T_C=100^\circ C$	4.5
Pulsed Drain Current	$I_{DM}$	28	A
Single Pulse Avalanche Energy	$E_{AS}$	280	mJ
Peak Diode Recovery dv/dt	dv/dt	50	V/ns
Maximum Power Dissipation	$P_D$	46	W
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55~+150	°C
Junction-to-Ambient	$R_{\theta JA}$	63	°C/W
Junction-to-Case	$R_{\theta JC}$	4.0	°C/W

## Electrical characteristics per line@25°C (unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Off Characteristics						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V, I_D=250\mu A$	700	-	-	V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=700V, V_{GS}=0V$	-	-	1.0	$\mu A$
Gate-Body Leakage Current	$I_{GSS}$	$V_{GS}=\pm 30V, V_{DS}=0V$	-	-	$\pm 100$	nA
On Characteristics						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2.0	-	4.0	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=3.5A$	-	1.18	1.4	$\Omega$
Forward Transfer Conductance	$g_{fs}$	$V_{DS}=15V, I_D=2A$	-	3.8	-	S
Dynamic Parameters						
Input Capacitance	$C_{iss}$	$V_{DS}=25V, V_{GS}=0V,$ $f=1MHz$	-	1209	-	pF
Output Capacitance	$C_{oss}$		-	104	-	
Reverse Transfer Capacitance	$C_{rss}$		-	12	-	
Gate Resistance	$R_G$	-	-	1.3	-	$\Omega$
Switching Parameters						
Turn-on Delay Time	$t_{d(on)}$	$V_{DS}=560V, V_{GS}=10V,$ $R_G=9.1\Omega, I_D=3A$	-	14	-	ns
Turn-on Rise Time	$t_r$		-	12	-	
Turn-Off Delay Time	$t_{d(off)}$		-	30	-	
Turn-Off Fall Time	$t_f$		-	20	-	
Total Gate Charge	$Q_g$	$V_{DS}=520V, I_D=3A,$ $V_{GS}=10V$	-	24	-	nC
Gate-Source Charge	$Q_{gs}$		-	6.0	-	
Gate-Drain Charge	$Q_{gd}$		-	11	-	
Drain-Source Diode Characteristics						
Body Diode Reverse Recovery Time	$t_{rr}$	$I_S=3A, di/dt=100A/\mu s,$ $V_{GS}=0V$	-	237	-	ns
Body Diode Reverse Recovery Charge	$Q_{rr}$		-	2.2	-	$\mu C$
Diode Forward Current	$I_S$	-	-	-	7.0	A
Diode Forward Voltage	$V_{SD}$	$V_{GS}=0V, I_S=3A$	-	-	1.4	V

## Typical Characteristics

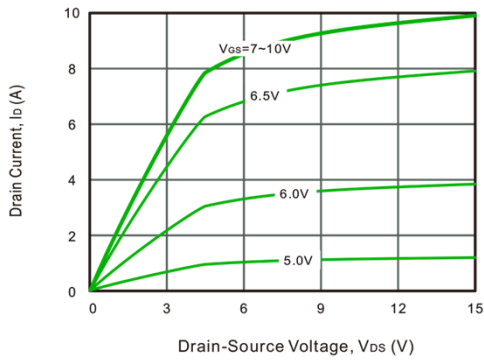


Fig.1 Output characteristics

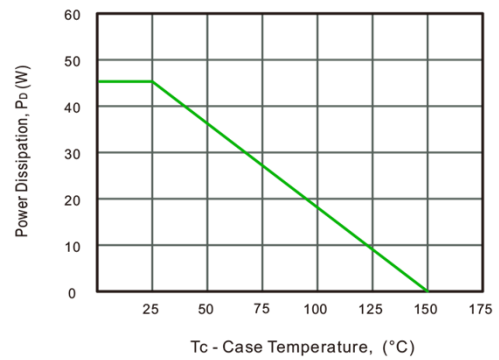


Fig.2 Power Dissipation

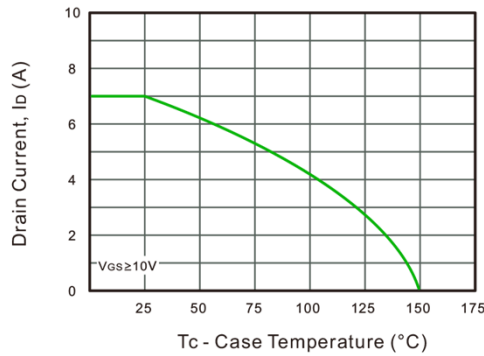


Fig.3 Drain Current Derating

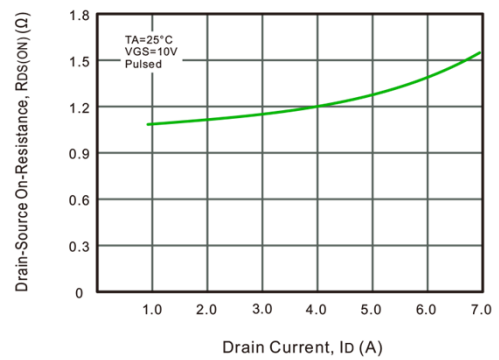


Fig.4 Drain-Source On-Resistance vs. Drain Current

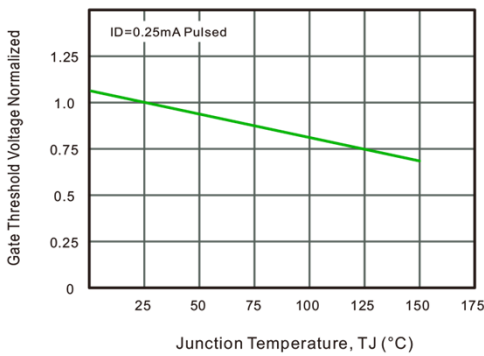


Fig.5 Gate Threshold Voltage vs. Junction Temperature

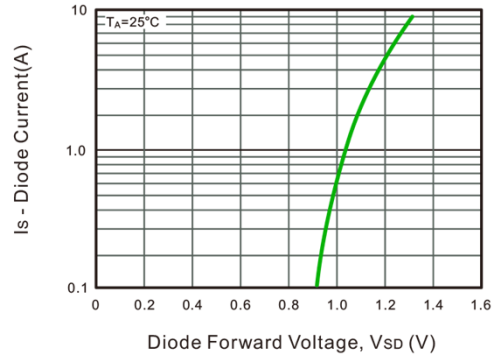


Fig.6 Body-diode Forward Characteristics

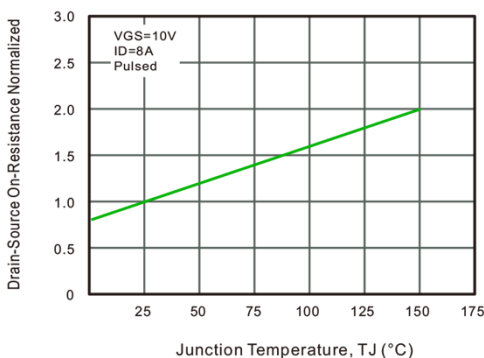


Fig.7 Drain-Source On-Resistance vs. Junction Temperature

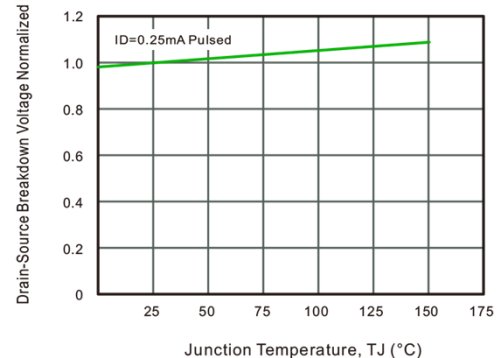


Fig.8 Breakdown Voltage vs. Junction Temperature

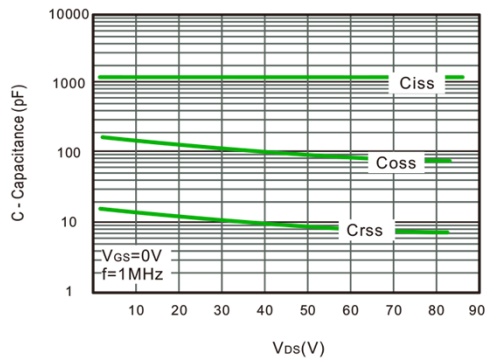


Fig.9 Capacitance Characteristics

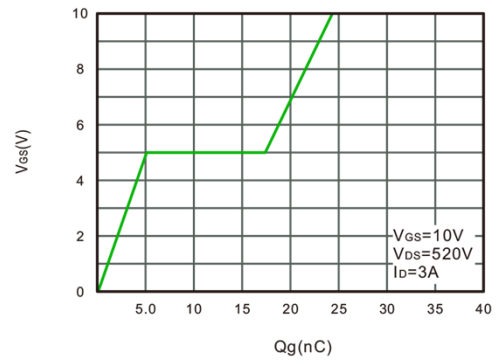


Fig.10 Gate Charge Characteristics

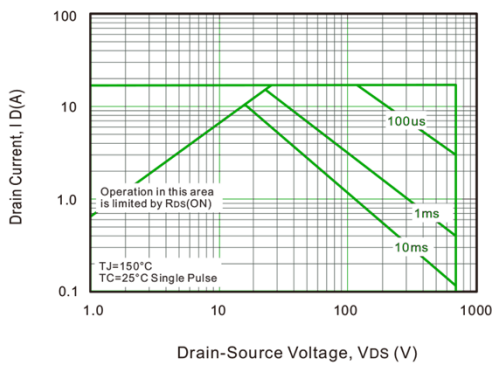


Fig.11 Safe Operating Area


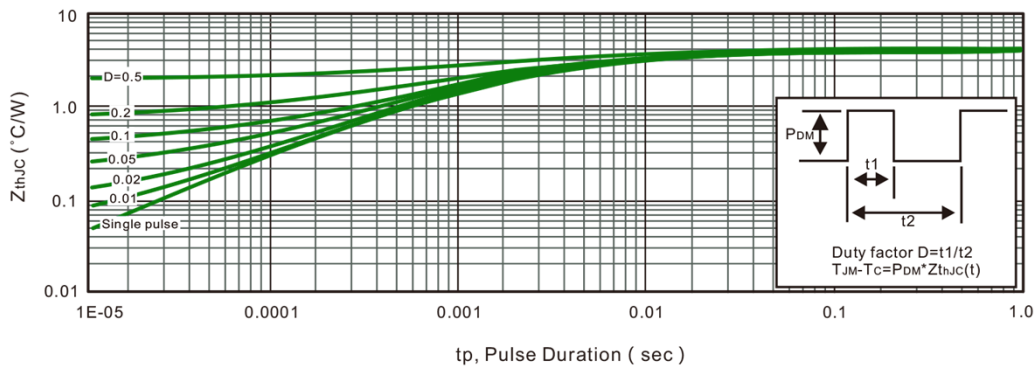



Fig.12 Max. Transient Thermal Impedance

## Product dimension (TO-220F-3L)

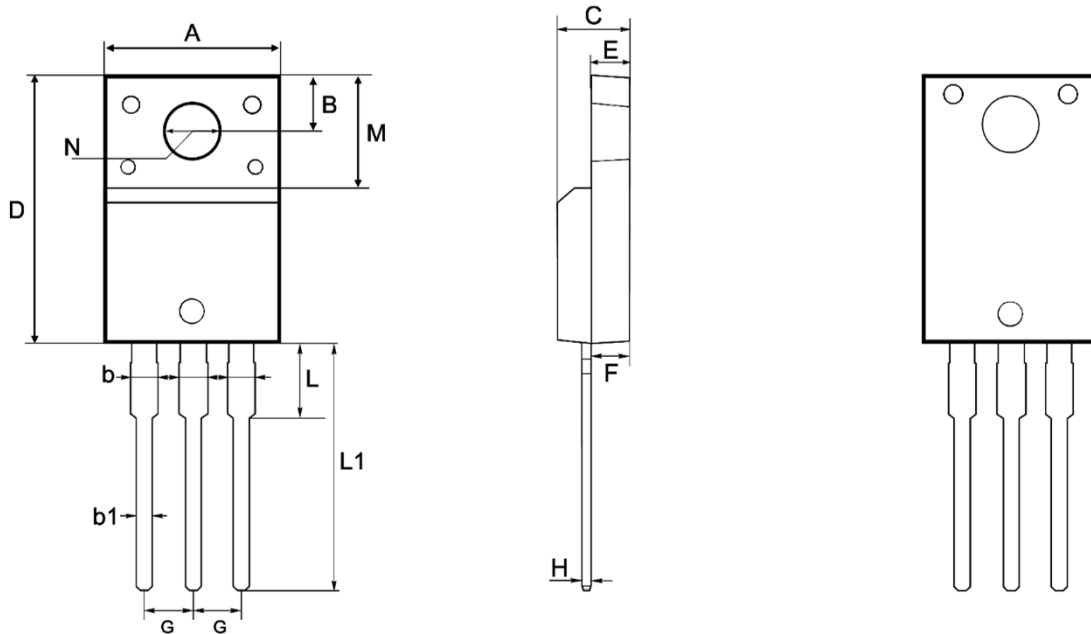

Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	10.08	10.28	0.397	0.405
B	3.17	3.37	0.125	0.133
b	1.24	1.44	0.049	0.057
b1	0.70	0.90	0.028	0.035
C	4.50	4.90	0.177	0.193
D	15.67	16.07	0.617	0.633
E	2.34	2.74	0.092	0.108
F	2.34	2.74	0.092	0.108
G	2.44	2.64	0.096	0.104
H	0.40	0.60	0.016	0.024
L	2.98	3.38	0.117	0.133
L1	13.30	13.70	0.524	0.539
M	6.38	6.98	0.251	0.275
N	3.18 Typ.		0.125 Typ.	


**IMPORTANT NOTICE**

 and **Prisemi**<sup>®</sup> are registered trademarks of **Prisemi Electronics Co., Ltd** (Prisemi), Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**<sup>®</sup> is a registered trademark of Prisemi Electronics.

All rights are reserved.