

Description

The PPMDP03R5L uses trench technology to provide excellent $R_{DS(on)}$ low gate charge. This device is suitable for power management and high efficiency applications at high switching frequencies applications.

MOSFET Product Summary		
$V_{DS}(V)$	$R_{DS(on)}(m\Omega)(Typ)$	$I_D(A)$
-30	3.5 @ $V_{GS} = -10V$	-110
	5.5 @ $V_{GS} = -4.5V$	

Feature




- High Power and current handling capability
- Lead free product is acquired
- Surface Mount Package

Applications

- PWM applications
- Load Switch
- Power Management
- DC-DC Converters
- Wireless Chargers

Absolute maximum rating@25°C

Rating	Symbol	Value	Units
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	±20	V
Drain Current-Continuous ¹⁾	I_D	$T_C=25^\circ C$	-110
		$T_C=100^\circ C$	-77
Pulsed Drain Current ²⁾	I_{DM}	-400	A
Maximum Power Dissipation ³⁾	P_{tot}	75	W
Avalanche Current ⁴⁾	I_{AS}	-70	A
Avalanche Energy ⁴⁾	E_{AS}	245	mJ
Thermal Resistance , Junction-to-Case ⁵⁾	$R_{\theta JC}$	1.5	°C/W
Thermal Resistance Junction-to-Ambient ⁵⁾	$R_{\theta JA}$	36.7	°C/W
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	°C


TO-252 (Top View)

Circuit Diagram

Marking (Top View)

Electrical characteristics per line@25°C (unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS} = 0V, I_D = -250\mu A$	-30	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -30V, V_{GS} = 0V$	-	-	-1.0	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$	-	-	± 100	nA
On Characteristics						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-1.0	-1.6	-2.5	V
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS} = -10V, I_D = -20A$	-	3.5	4.5	m Ω
		$V_{GS} = -4.5V, I_D = -15A$	-	5.5	7.0	
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS} = -15V, V_{GS} = 0V$ $f = 1MHz$	-	4491	-	pF
Output Capacitance	C_{oss}		-	698	-	
Reverse Transfer Capacitance	C_{rss}		-	603	-	
Switching Characteristics						
Turn-on Delay Time	$t_{d(on)}$	$V_{DS} = -15V, V_{GS} = -10V,$ $R_G = 3\Omega, I_D = -20A$	-	8	-	ns
Turn-on Rise Time	t_r		-	25	-	
Turn-Off Delay Time	$t_{d(off)}$		-	123	-	
Turn-Off Fall Time	t_f		-	100	-	
Total Gate Charge	Q_g	$V_{DS} = -15V, V_{GS} = -10V,$ $I_D = -30A$	-	148	-	nC
Gate-Source Charge	Q_{gs}		-	23	-	
Gate-Drain Charge	Q_{gd}		-	37	-	
Gate Resistance	R_g	$f = 1MHz, \text{Open Drain}$	-	5.3	-	Ω
Drain-Source Diode Characteristics						
Diode Forward Voltage	V_{SD}	$V_{GS} = 0V, I_S = -20A$	-	-0.8	-1.2	V
Reverse Recovery Time	t_{rr}	$I_F = -20A, di/dt = 100A/\mu s$	-	42	-	ns
Reverse Recovery Charge	Q_{rr}		-	27	-	nC

Notes:

1. Computed continuous current assumes the condition of T_{J_Max} while the actual continuous current depends on the thermal & electro-mechanical application board design.
2. Repetitive Rating: Pulse width limited by maximum junction temperature ($T_{J_Max} = 150^\circ C$).
3. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
4. This single-pulse measurement was taken under the following condition ($L = 0.1mH, V_{GS} = -10V, V_{DS} = -30V$) while it's value is limited by $T_{J_Max} = 150^\circ C$.
5. Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch square copper pad layout.
6. Guaranteed by design, not subject to production.

Typical Characteristics

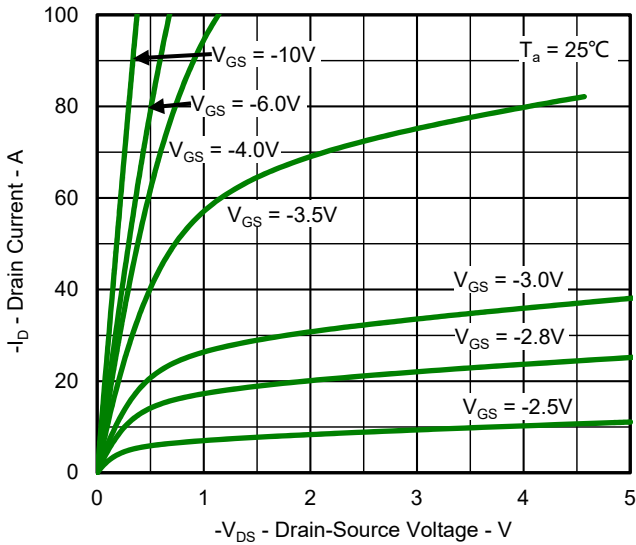


Fig.1 Output Characteristics

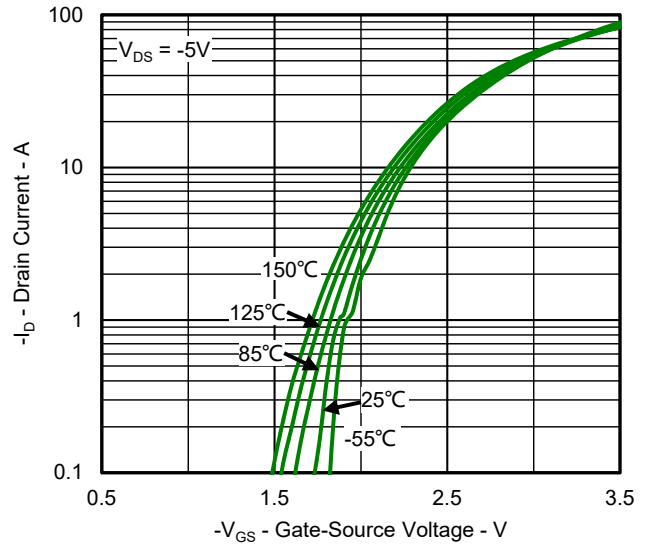


Fig.2 Typical Transfer Characteristic

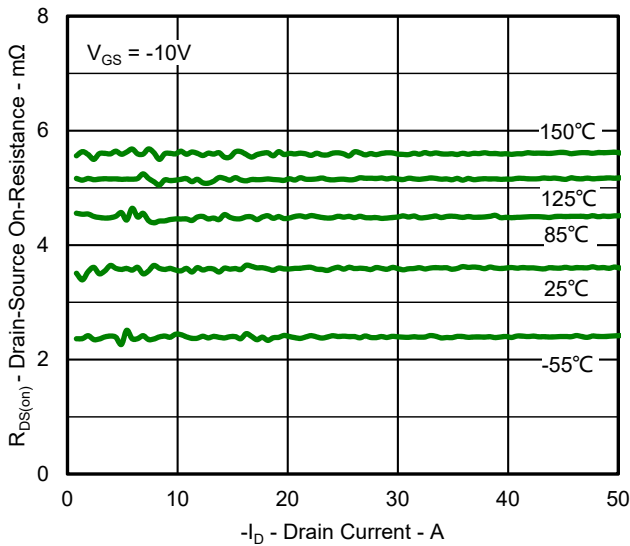


Fig.3 Typical On-Resistance vs Drain Current and Temperature

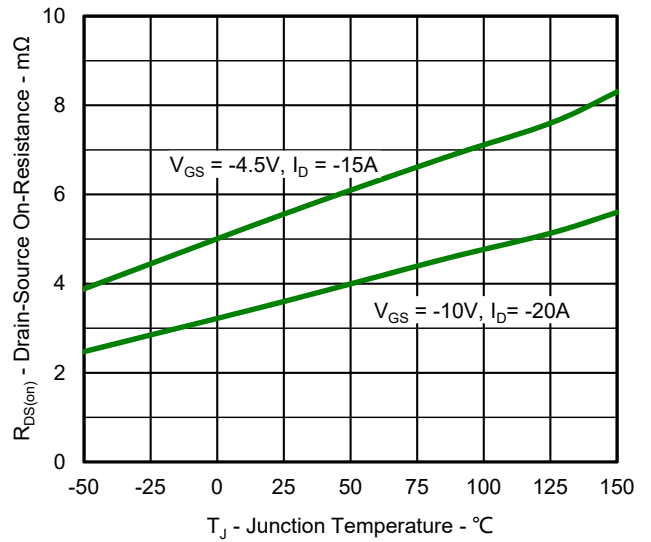


Fig.4 On-Resistance Variation with Temperature

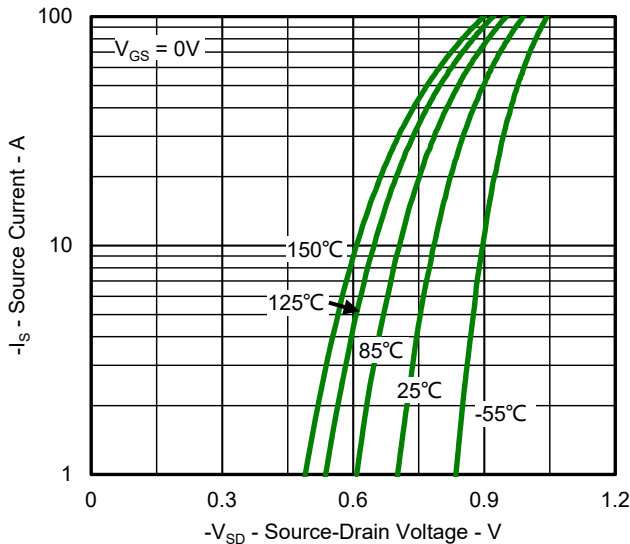


Fig.5 Diode Forward Voltage vs. Current

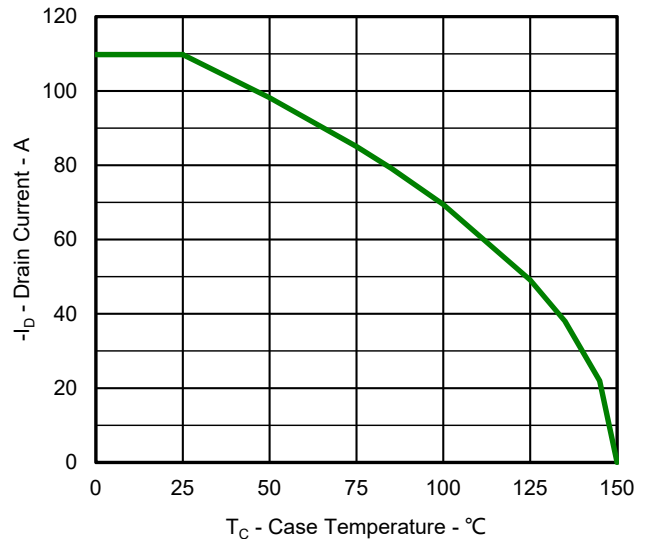


Fig.6 Maximum Drain Current vs. Case Temperature

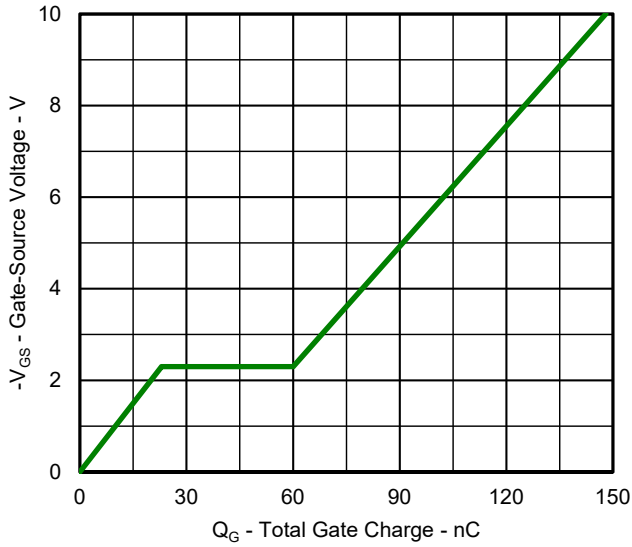


Fig.7 Gate Charge Characteristics

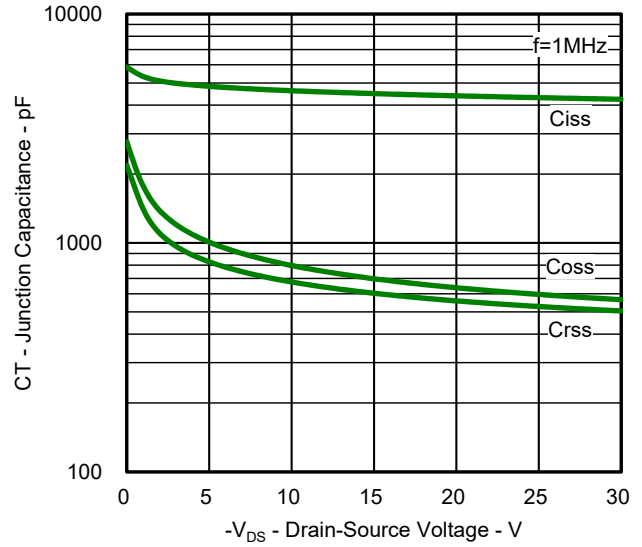


Fig.8 Typical Junction Capacitance

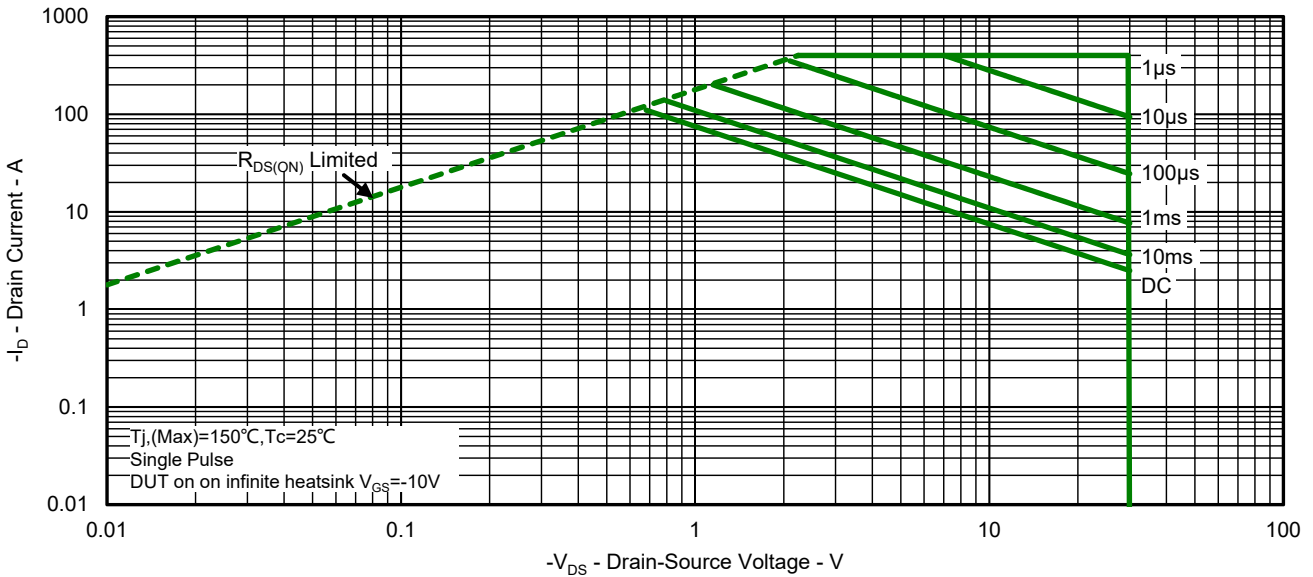


Fig.9 Safe Operation Area


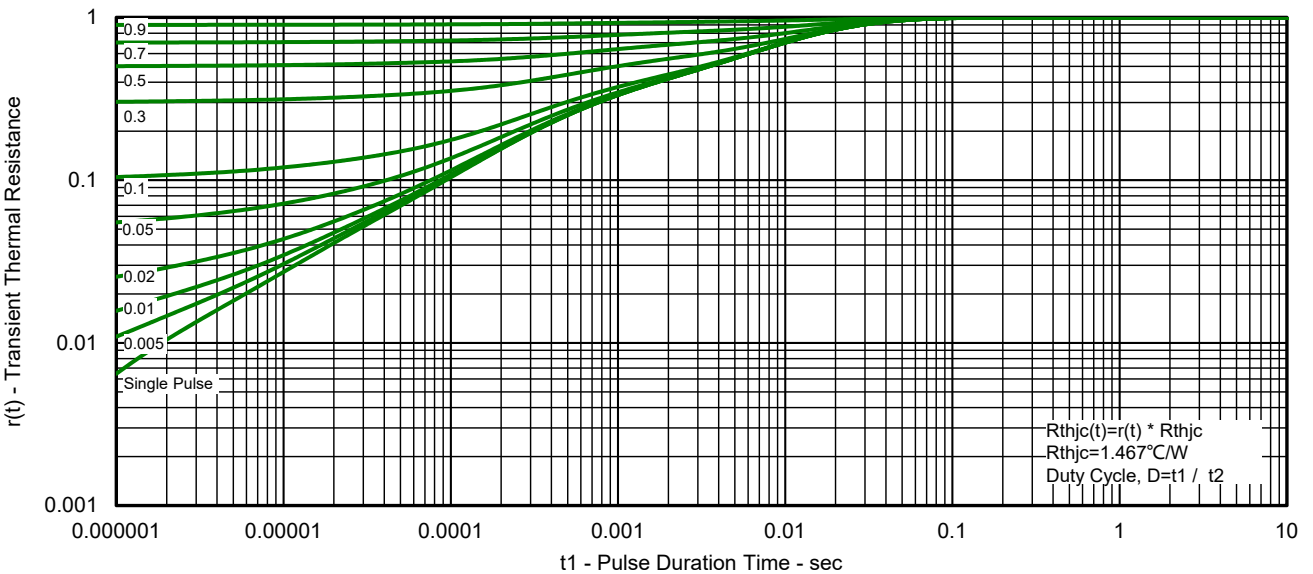


Fig.10 Transient Thermal Resistance

Product Dimension (TO-252)

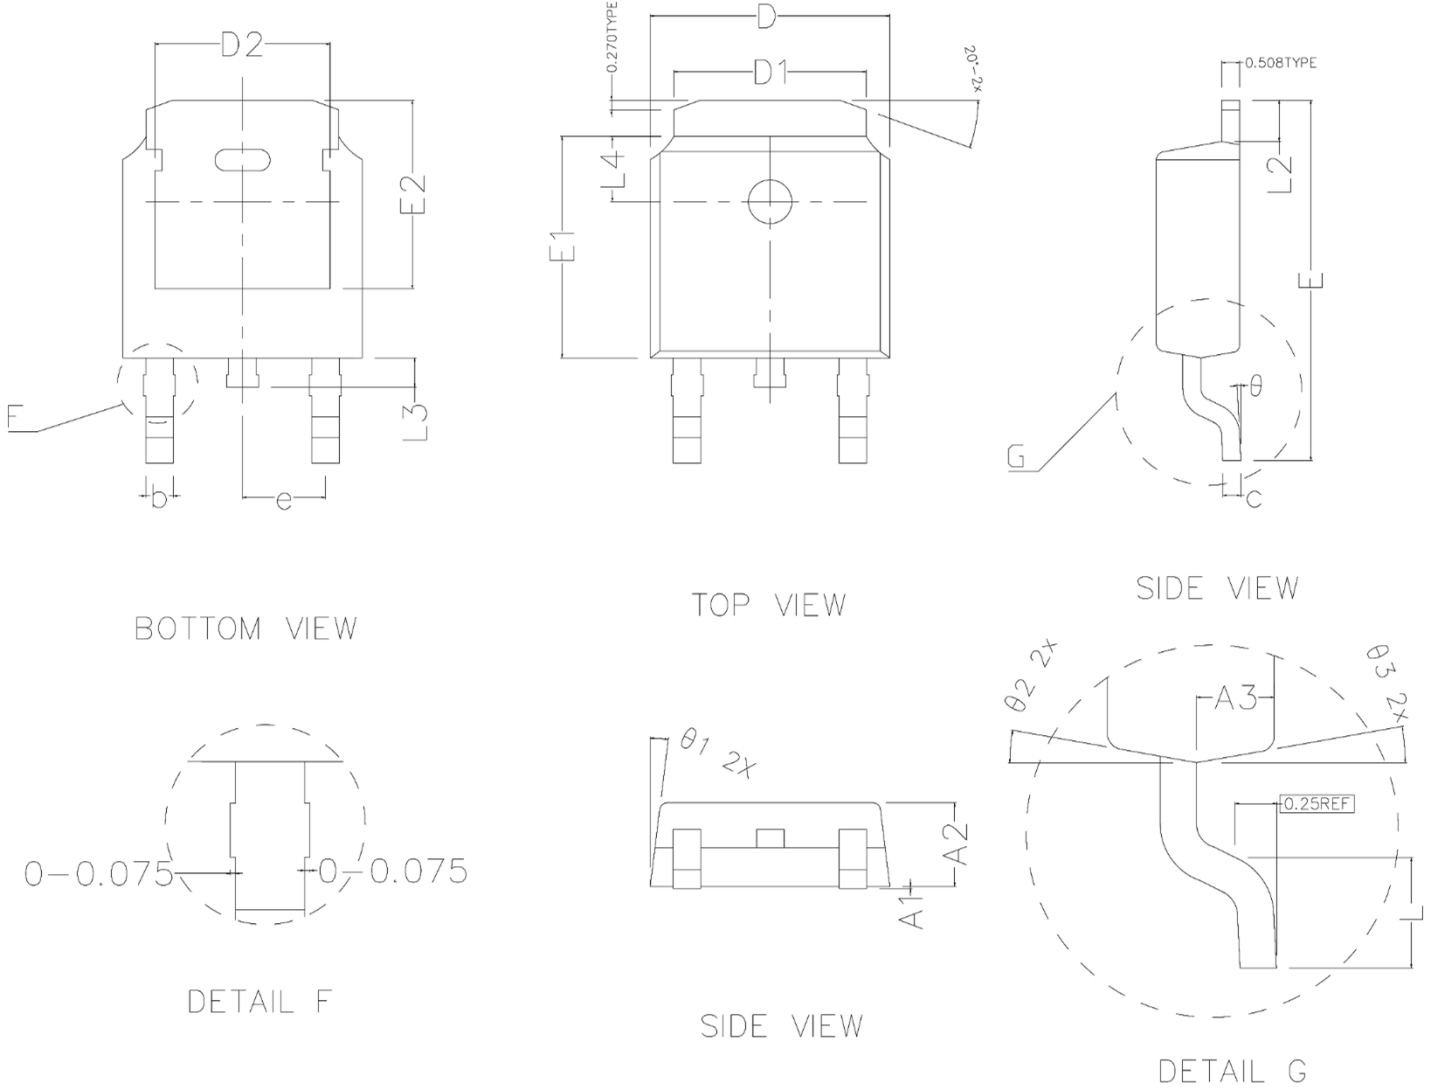

BOTTOM VIEW

TOP VIEW

SIDE VIEW

0-0.075 0-0.075

DETAIL F

SIDE VIEW


DETAIL G

Dim	Millimeters		Inches		Dim	Millimeters		Inches	
	Min	Max	Min	Max		Min	Max	Min	Max
A1	0.03	0.13	0.001	0.005	E2	5.14 Ref.		0.202 Ref.	
A2	2.20	2.40	0.087	0.094	e	2.286 Typ.		0.090 Typ.	
A3	0.96	1.06	0.038	0.042	L	1.40	1.60	0.055	0.063
b	0.64	0.74	0.025	0.029	L2	1.00 Ref.		0.039 Ref.	
c	0.46	0.55	0.018	0.022	L3	0.80 Ref.		0.031 Ref.	
D	6.50	6.70	0.256	0.264	L4	1.80 Ref.		0.071 Ref.	
D1	5.334 Ref.		0.210 Ref.		θ	0°	8°	0°	8°
D2	4.83 Ref.		0.190 Ref.		θ1	7° Typ.		7° Typ.	
E	9.77	10.17	0.385	0.400	θ2	7° Typ.		7° Typ.	
E1	6.00	6.20	0.236	0.244	θ3	7° Typ.		7° Typ.	

Ordering Information


Package	Reel	Shipping
TO-252	13"	2500 / Tape & Reel

Load With Information

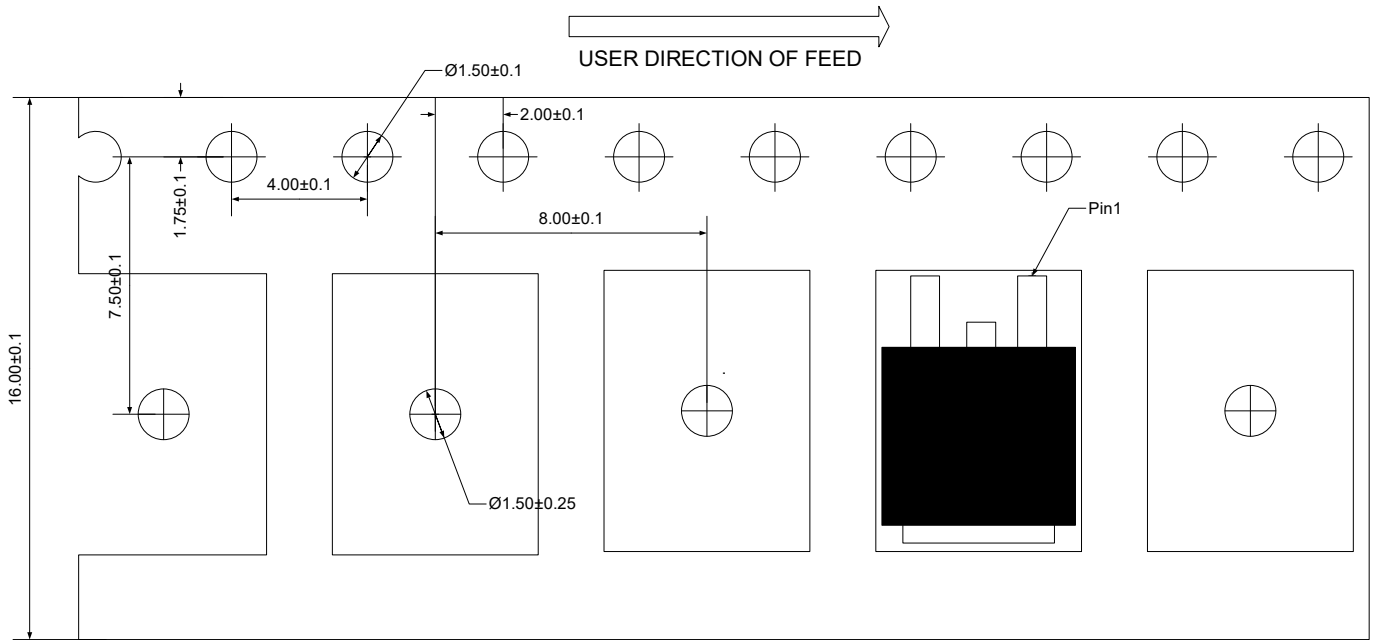

Unit:mm


IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd** (Prisemi), Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.