

## Description


The PTVSHC3N7VUM transient voltage suppressor is designed to replace multilayer varistors (MLVs) in portable applications such as cell phones, notebook computers, and PDA's.

They feature large cross-sectional area junctions for conducting high transient currents, offer desirable electrical characteristics for board level protection, such as fast response time, lower operating voltage, lower clamping voltage and no device degradation when compared to MLVs.


The PTVSHC3N7VUM protects sensitive semiconductor components from damage or upset due to electrostatic discharge (ESD) and other voltage induced transient events.

The PTVSHC3N7VUM is available in a DFN2020-3L package with working voltages of 7 volt.

It is used to meet the ESD immunity requirements of IEC 61000-4-2, Level 4 ( $\pm 30\text{kV}$  air,  $\pm 30\text{kV}$  contact discharge)



**Marking (Top View)**



**Circuit Diagram**

## Feature

- 5100W Peak pulse power per line ( $t_p = 8/20\mu\text{s}$ )
- DFN2020-3L package
- Response time is typically  $< 1\text{ ns}$
- Protect one I/O or power line
- RoHS compliant
- Transient protection for data lines to  
IEC 61000-4-2(ESD)  $\pm 30\text{kV}$ (air),  $30\text{kV}$ (contact);  
IEC 61000-4-5 (Lightning)  $280\text{A}$  ( $8/20\mu\text{s}$ )

## Applications

- Power Management
- Industrial Application
- Power Supply Protection
- Cell phone handsets and accessories
- Personal digital assistants (PDA's)
- Notebooks, desktops, and servers
- Portable instrumentation
- Cordless phones
- Peripherals

## Mechanical Characteristics


- Lead finish: 100% matte Sn(Tin)
- Mounting position: Any
- Qualified max reflow temperature:  $260^\circ\text{C}$
- Pure tin plating:  $7 \sim 17\text{ }\mu\text{m}$

# Transient Voltage Suppressor

PTVSHC3N7VUM

## Electronics Parameter

Symbol	Parameter
$V_{RWM}$	Peak Reverse Working Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$P_{PP}$	Peak Pulse Power
$C_J$	Junction Capacitance
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

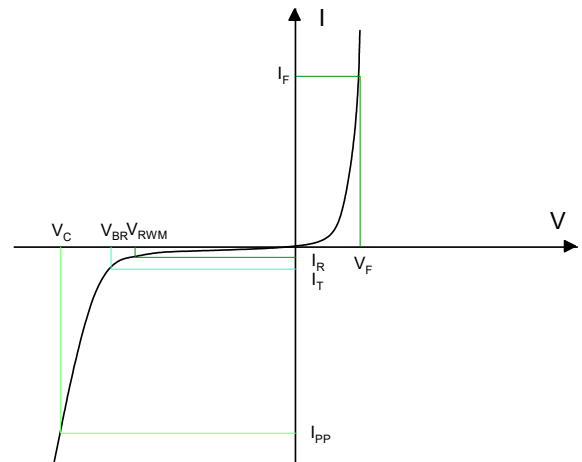


## Electrical characteristics per line@25°C (unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Peak Reverse Working Voltage	$V_{RWM}$	-	-	-	7.0	V
Breakdown Voltage	$V_{BR}$	$I_t = 1\text{mA}$	8.0	-	10	V
Reverse Leakage Current	$I_R$	$V_{RWM} = 7\text{V}$	-	-	1.0	$\mu\text{A}$
Clamping Voltage	$V_C$	$I_{PP} = 150\text{A}, t_p = 8/20\mu\text{s}$	-	13	15	V
		$I_{PP} = 280\text{A}, t_p = 8/20\mu\text{s}$	-	16	18	
Junction Capacitance	$C_J$	$V_R = 0\text{V}, f = 1\text{MHz}$	-	2950	3300	pF


## Absolute maximum rating@25°C

Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu\text{s}$ )	$P_{PP}$	5100	W
Peak Pulse Current ( $t_p = 8/20\mu\text{s}$ )	$I_{PP}$	280	A
Lead Soldering Temperature	$T_L$	260 (10 sec)	°C
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55~+150	°C


## Typical Characteristics

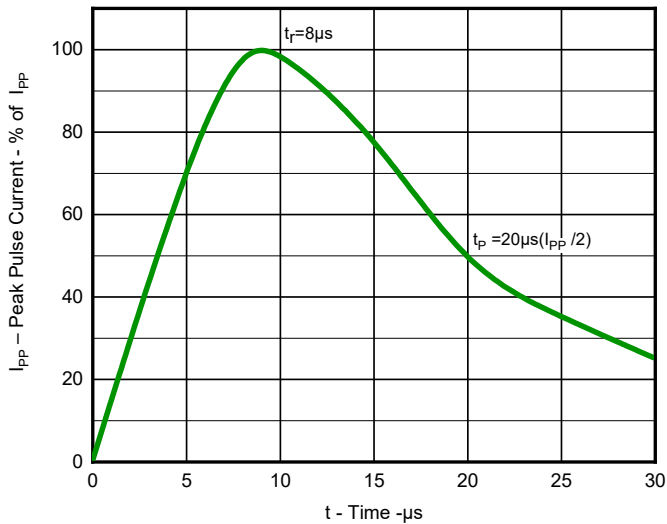


**Fig 1. Pulse Waveform(8/20 $\mu s$ )**

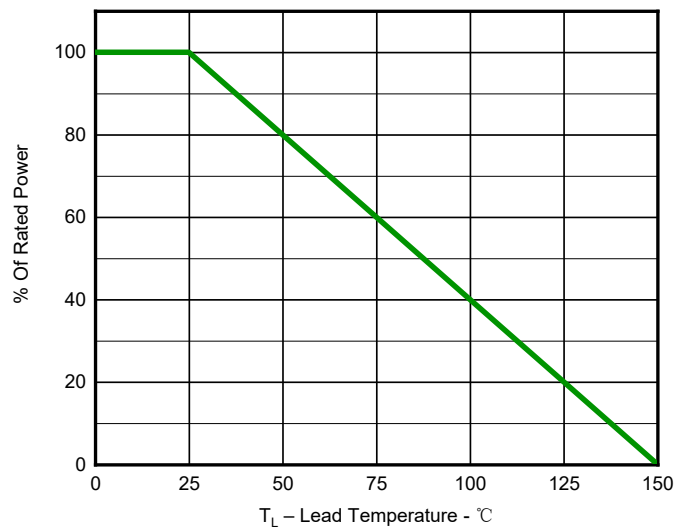


**Fig 2. Power Derating Curve**

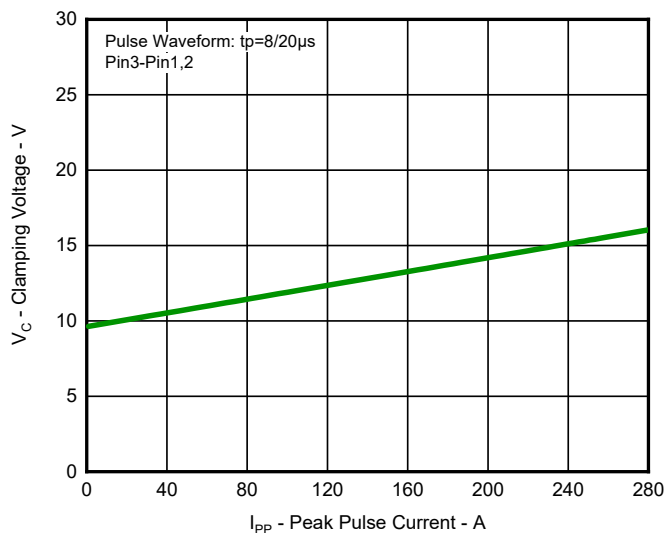


**Fig 3. Clamping Voltage vs. Peak Pulse Current**

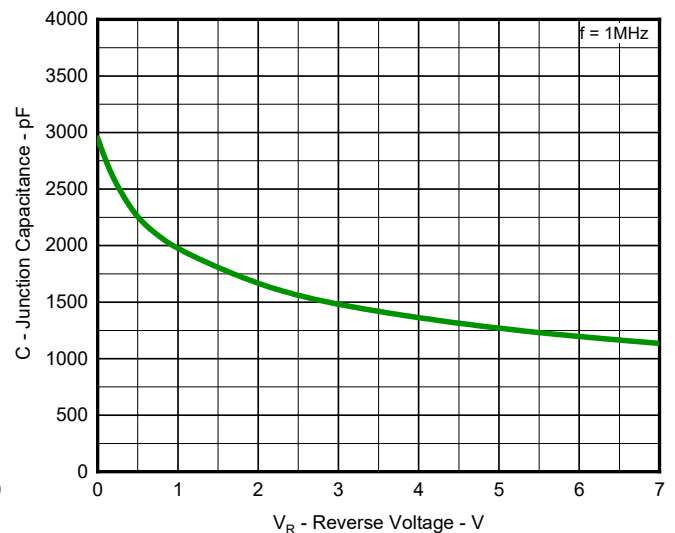

**Fig 4. Capacitance vs. Reverse Voltage**

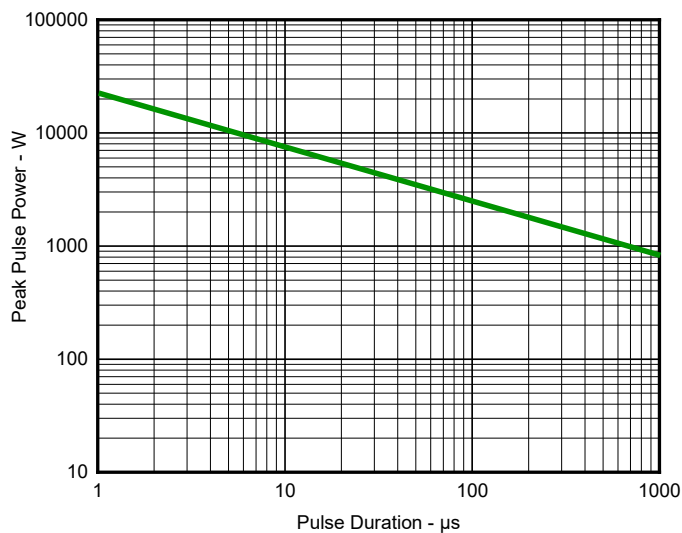


**Fig 5. Non Repetitive Peak Pulse Power vs. Pulse Time**

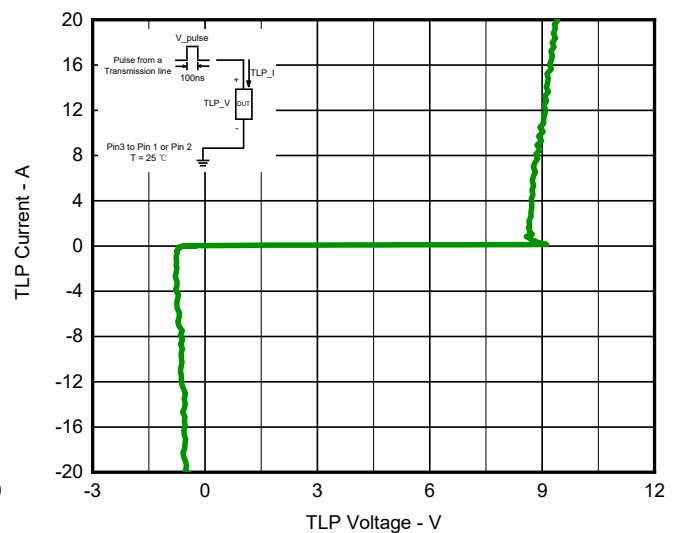

**Fig 6. TLP Measurement**

## Solder Reflow Recommendation

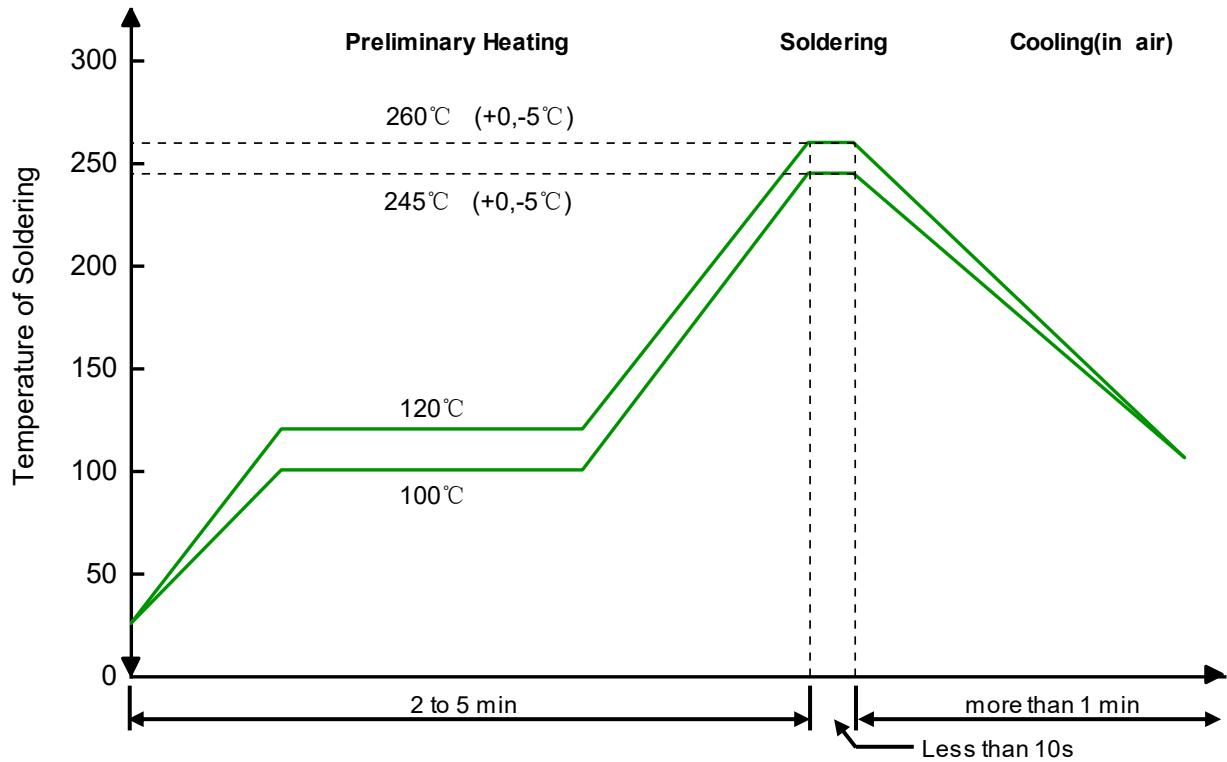

Remark: Pb free for 260°C; Pb for 245°C.

## PCB Design


For TVS diodes a low-ohmic and low-inductive path to chassis earth is absolutely mandatory in order to achieve good ESD protection. Novices in the area of ESD protection should take following suggestions to heart:

- Do not use stubs, but place the cathode of the TVS diode directly on the signal trace.
- Do not make false economies and save copper for the ground connection.
- Place via holes to ground as close as possible to the anode of the TVS diode.
- Use as many via holes as possible for the ground connection.
- Keep the length of via holes in mind! The longer the more inductance they will have.


## Ordering information

Device	Package	Reel	Shipping
PTVSHC3N7VUM	DFN2020-3L (Pb-Free)	7"	3000 / Tape & Reel

## Product dimension (DFN2020-3L)

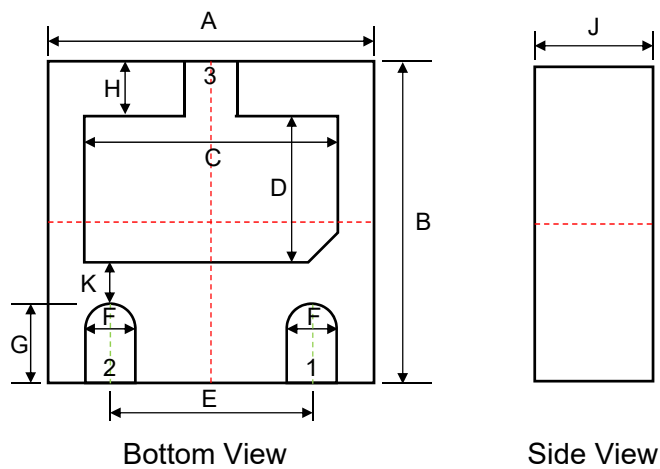


Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	1.90	2.10	0.075	0.083
B	1.90	2.10	0.075	0.083
C	1.40	1.60	0.055	0.063
D	0.90	1.15	0.035	0.045
E	1.30 BSC		0.051 BSC	
F	0.25	0.35	0.010	0.014
G	0.35	0.45	0.014	0.018
H	0.15	0.30	0.006	0.012
J	0.50	0.60	0.020	0.024
K	0.30 BSC		0.012 BSC	

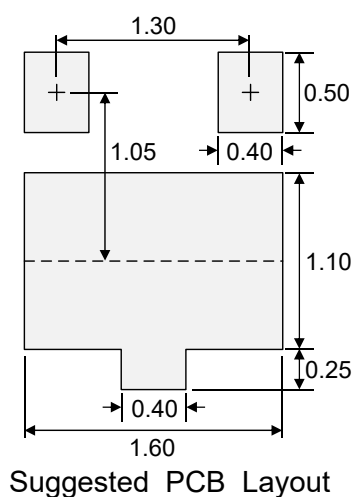


Unit: mm

## Load with information

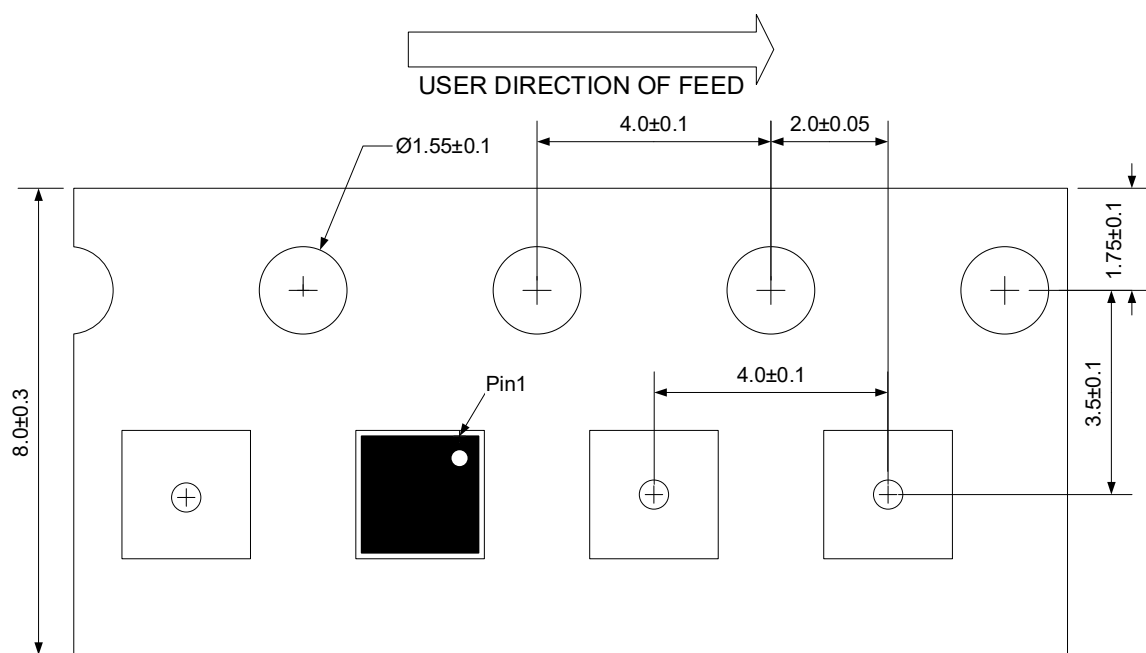

Unit:mm


**IMPORTANT NOTICE**

 and **Prisemi**<sup>®</sup> are registered trademarks of **Prisemi Electronics Co., Ltd** (Prisemi), Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**<sup>®</sup> is a registered trademark of Prisemi Electronics.

All rights are reserved.